




PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

SANITARY WARE SPECIFICATION SHEET

Item Descriptions	GROHE (Germany) "Tempesta System 210" Wall-mounted shower system with thermostatic mixer; including showerhead (26408000), hand shower (28422002) and shower hose (28410002)
Dimensions	L412 x W298 x H1132 mm
Model	26302002
Finish	Chrome Plated
Country of origin	Germany
Manufacturer	GROHE Limited
Supplier	Acme Sanitary Ware Co. Ltd Mr. Eric Wong/ Mr. Don Yuen
Contact Tel/Fax	(852) 2388-7171 / (852) 2710-8012
E-mail	acme@acmesanitary.com.hk
Website	www.acmesanitary.com.hk

Illustration/ Drawing

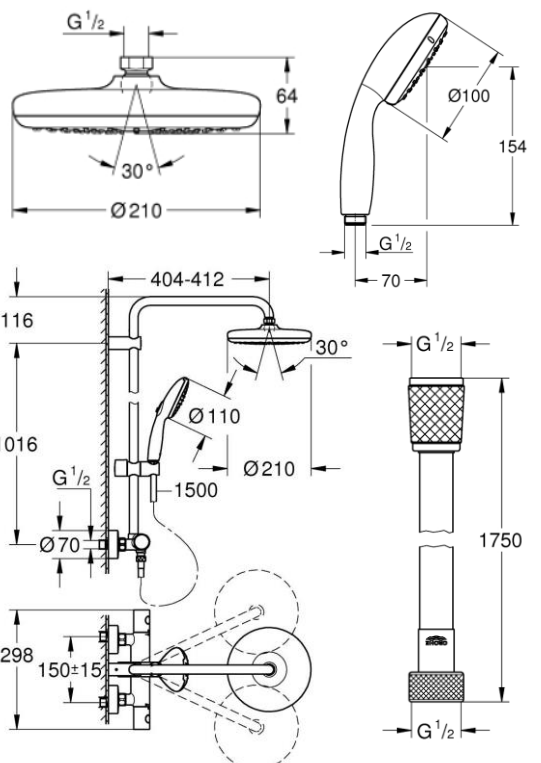

- Consisting of:
- horizontal swivable 390 mm projection shower arm
- **exposed thermostatic shower** with Aquadimmer function
- allows change between:
- head shower Tempesta 210 (26 408)
- spray pattern: **Rain**
- with ball joint
- rotation angle $\pm 15^\circ$
- hand shower Tempesta Cosmopolitan 100 (28 422)
- 2 spray patterns: **Rain, Jet**
- adjustable height via gliding element
- RotaflexTwistStop shower hose 1750 mm 1/2" x 1/2" (28 410)
- maximum flow rate (at 3 bar): 17.3 l/min
- **GROHE TurboStat** compact cartridge with wax thermoelement
- **GROHE SafeStop** safety button at 38°C (**calibration required**)
- **GROHE SafeStop Plus** optional temperature limiter at 43°C included
- GROHE SmartSwitch - easily rotate the dial to enjoy your preferred spray option
- **GROHE DreamSpray** perfect spray pattern
- ShockProof silicone ring prevents damage caused by a shower falling
- **GROHE StarLight** chrome finish
- **SpeedClean** anti-limescale system
- **Inner WaterGuide** for a longer life
- TwistStop preventing the hose from twisting
- suitable for instantaneous heaters from 18 kW/h
- minimum flow rate 7 l/min.
- optional upgrade: GROHE EasyReach tray (26 362)

* All information of the above is for the reference only. No prior notice is made if any changes.




PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

SANITARY WARE SPECIFICATION SHEET

26408000

"Tempesta 210" Head shower 1 spray


- Rain
- Ø 210 mm
- Ball joint +/- 15° rotatable
- connection thread 1/2"
- **GROHE DreamSpray** perfect spray pattern
- **GROHE StarLight** chrome finish
- **SpeedClean** anti-limescale system
- **Inner WaterGuide** for a longer life
- suitable for instantaneous heater

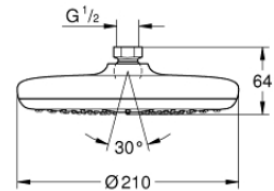

28422002

"Tempesta 100" Hand shower 2 sprays


- Rain, Jet
- **GROHE DreamSpray** perfect spray pattern
- **GROHE Long-Life** finish
- **SpeedClean** anti-limescale system
- **Inner WaterGuide** for a longer life
- ShockProof silicone ring prevents damage caused by a shower falling
- Universal Mounting System. Fits all standard shower hoses
- for low pressure
- min. recommended pressure 0.2 bar

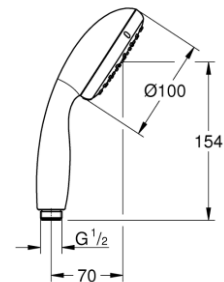

28410002

"Relaxaflex" Shower hose

- 1750 mm
- smooth surface for easy cleaning
- Rotation cone for TwistStop function
- pressure resistance up to 5 bar
- tensile strength 500 N
- heat resistance 70°C
- AntiFold bendproof
- universal connection G 1/2" x 1/2"
- **GROHE ProGrip with knurl structure**
- **GROHE Long-Life** finish

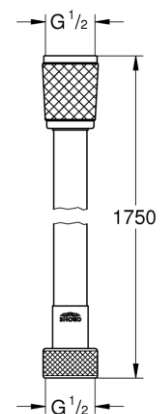



PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

SANITARY WARE SPECIFICATION SHEET



Constant water temperature thanks to reliable GROHE TurboStat technology

Our precise control technology ensures an instant water flow at the desired temperature and keeps it constant irrespective of any fluctuations in water pressure or supply.



GROHE SafeStop (Plus) – double scalding protection at 38°C and (optional) 43°C

Great for homes with children, this safety feature is set at 38°C, preventing you from turning up the water temperature too high. If desired, higher temperatures can be selected by pushing the button. Optional for extra safety: the easy-to-fit GROHE SafeStop Plus limiter ensures that the temperature does not exceed 43°C.



GROHE DreamSpray for luxurious showering

The GROHE DreamSpray technology turns your daily shower into a luxuriously relaxing experience. The advanced engineering of the shower head ensures a balanced flow of water from all nozzles, whatever spray pattern you choose.



Easy to clean thanks to the GROHE StarLight chrome coating

Just wipe the tap down with a dry cloth – the ultra smooth surface finish is scratch resistant and ensures a lasting luminous sheen. You'll save plenty of time cleaning while your tap always looks shiny and new.



SpeedClean: easy cleaning thanks to silicone nozzle

Indeed, the name says it all: with the SpeedClean technology, you'll have limescale removed from the spout in the blink of an eye thanks to a nozzle made of silicone. A quick wipe with your fingers is all it takes to remove any limescale deposits, saving you a lot of time and effort!




Coating protected by Inner WaterGuide

A strong insulation of the water guide inside the shower prevents its surface from heating up, so it will never be too hot for you to touch. At the same time, this serves to protect the finish of your GROHE shower, further enhancing its great durability.



GROHE EasyReach tray – always keep shower gel and shampoo handy

Always keep your shower gel and shampoo handy with the GROHE EasyReach tray. The flat tray surface is designed to match your tap for a great look and quick easy cleaning.

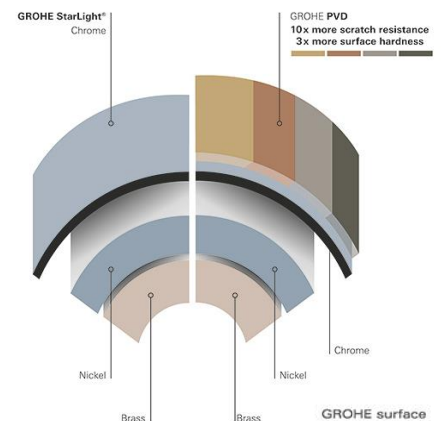

GROHE surface hardness



Chrome PVD

GROHE scratch resistance



Chrome PVD

* All information of the above is for the reference only. No prior notice is made if any changes.