

# Acme Sanitary Ware Co. Ltd.

1/F, Acme Building, 22-28 Nanking Street, Kowloon, Hong Kong Tel: 2388 7171 Fax: 2710 8012 Email: acme@acmesanitary.com.hk Since 1949 Website: www.acmesanitary.com.hk



PROJECT	REF	REV	ITEM CODE	
LOCATION	DATE		PAGE	

## SANITARY WARE SPECIFICATION SHEET

Item Descriptions GROHE (Germany) "Grohtherm SmartControl" thermostat shower mixer with mixing device and adjustable temperature limiter with 3 valves;" Euphoria 260 " chrome plated 3 spray patterns shower head with arm operated by centre knok; "New Tempesta Cosmopolitan 100" 2 sprays hand shower set; Nominal flow rate 7.9 L/min & 5.3 L/min in WELS Grade 1; Registration No. SB 18-0032 & SB 18-0094 Model 29121000 (Thermostat mixer) 35600000 (Mounting box) 26457000 + 28361000 (Shower head & arm ) 27057000 (Shower outlet elbow) 13139003 (Atrio bath spout) 2757820E (Hand shower set) Material Chrome Plated **GROHE Limited** Manufacturer Supplier Acme Sanitary Ware Co. Ltd Mr. Eric Wong/ Mr. Don Yuen Contact Tel/Fax (852) 2388-7171 / (852) 2710-8012 E-mail acme@acmesanitary.com.hk Website www.acmesanitary.com.hk

# Illustration/ Drawing 000 1500 G 1/2 G 1/2 35-45 -- 146 -75-105 30%

# Shower head

Dynamic flow pressure (kPa)	50	150	250	350	500
Flow rate (1/min)	6.45	8.00	7.70	7.98	8.28

# **Hand Shower**

Dynamic flow pressure (kPa)	50	150	250	350	500
Flow rate (l/min)	4.00	5.10	5.25	5.43	5.50

Note:

<sup>\*</sup> All information of the above is for the reference only. No prior notice is made if any changes.



# Acme Sanitary Ware Co. Ltd.

1/F, Acme Building, 22-28 Nanking Street, Kowloon, Hong Kong Tel: 2388 7171 Fax: 2710 8012 Email: acme@acmesanitary.com.hk



PROJECT	REF	REV	ITEM CODE	
LOCATION	DATE		PAGE	

## SANITARY WARE SPECIFICATION SHEET

#### Grohtherm SmartControl

Thermostat for concealed installation with 3 valves set for final installation for

GROHE Rapido SmartBox 35 600 000

metal wall escutcheon with GROHE QuickFix (covered escutcheon

and shaft sealing, covered fixing), retroactively 6° adjustable

GROHE StarLight chrome finish

GROHE SmartControl push for ON-OFF, turn for volume adjustment from EcoJoy to full flow exchangeable symbols

GROHE TurboStat compact cartridge

with wax thermoelement

GROHE SafeStop safety button at 38°C

( calibration required )

GROHE SafeStop Plus optional temperature limiter at 43°C included

built-in non return valve

and dirt strainers

multiple outlets can be run simultaneously

without roughing-in-set

flow performance:

outlet  $A = 23 \frac{1}{min}$ outlet B = 27 l/min

outlet C = 23 1/min

### GROHE Rapido SmartBox

Universal rough-in box, 1/2" 3 outlets 1/2" 2 inlets below, 1/2"


installation depth 75-105 mm connection unit in DR brass pre-mounted flushing plug

stable build-in box and protective cover fixing options for solid walls and dry

cladding gasket

without set for final installation





### New Tempesta Cosmopolitan 100

Shower rail set 2 sprays

Consisting of:

hand shower Tempesta Cosmopolitan 100 (27 571 20E)

shower rail, 600mm (27 521)

Relexaflex hose 1750 mm 1/2" x 1/2" (28 154)

GROHE EcoJoy 5.7 1/min. flow limiter

GROHE DreamSpray perfect spray pattern GROHE StarLight chrome finish

SpeedClean anti-limescale system

Inner WaterGuide for a longer life

### Euphoria 260

Head shower set 380 mm, 3 sprays

Consisting of:

head shower Euphoria 260 (26 457)

3 spray patterns:

Rain, SmartRain, Jet

shower arm Rainshower 380 mm (28 361 000)

GROHE EcoJoy 9.5 1/min flow limiter

GROHE DreamSpray perfect spray pattern

GROHE StarLight chrome finish SpeedClean anti-limescale system Inner WaterGuide for a longer life suitable for instantaneous heater min. recommended pressure 1 bar



Ø260

Rainshower® Shower outlet elbow, 1/2" male threadwith round escutcheon Protected against backflow GROHE StarLight® chrome finis

# wall mounted spout


GROHE StarLight chrome finish mousseur


projection 171 mm minimum pressure 1.0 bar

### 1500 mm flexible hose

blister pack

smooth surface for easy cleaning tensile strength 500 N pressure resistance up to 5 bar heat resistance 70°C AntiFold bendproof universal connection G 1/2" x 1/2" Rotaflex for Twistfree-function GROHE StarLight chrome finish







Note:

<sup>\*</sup> All information of the above is for the reference only. No prior notice is made if any changes.

# 3 Key advantageous comparisons with another brand

### 1) Only 1 wall plate needed = Half expenditures





1 plate only

### 2) Integrated Volume Control



With Volume Control



### 3) Slim Design, shorter projection



10mm 43mm


Slim design up to 43mm

# Brand x





Without Volume Control




Thickness up to about 80mm



### GROHE Euphoria 260 SmartControl head shower set – a perfect upgrade for your shower!

Showering style and versatility! With three innovative spray zones, the elegant GROHE Euphoria 260 SmartControl head shower set adds instant luxury to your bathroom. Jet Spray is powerful and focused, perfect for washing out shampoo and an invigorating head or neck massage. The SmartRain Spray is wider for an energizing yet relaxing experience and Rain Spray uses all the nozzles on the generous spray plate for full body coverage and a truly soothing shower. To choose the spray you want all you have to do is turn the innovative button in the centre of the impressive 260mm spray head. Simple! With its slim profile and timeless design, it looks perfect in a wide range of bathroom styles and is packed with GROHE technology. GROHE EcoJoy has a 9.5 l/min flow limiter that saves water while ensuring maximum showering satisfaction. GROHE DreamSpray ensures the flow from every nozzle will be just right – whichever spray zone you select – to deliver the most enjoyable shower possible. The dazzling scratch resistant GROHE StarLight chrome finish keeps its sparkle for a lifetime and limescale can be removed from the silicone SpeedClean nozzles with a simple wipe. It comes complete with a dedicated GROHE Rainshower arm (380mm), is easy to install and the Inner WaterGuide prevents the surface from getting too hot to protect both sensitive skin and the chrome. The elegant GROHE Euphoria 260 SmartControl head shower – delivers everything from relaxation to revitalisation!

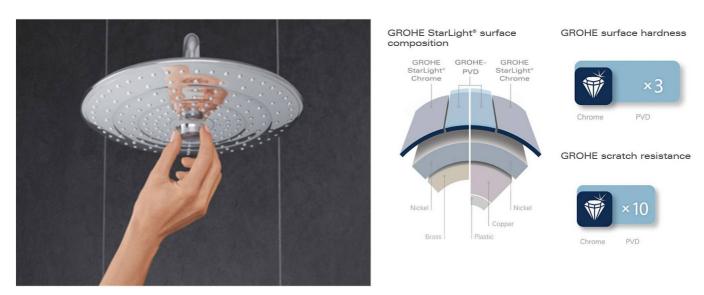

Three spray zones that can soothe or revitalise

With the innovative button in the spray plate it's easy to choose the perfect spray for your mood. Jet Spray is powerful and focused, perfect for washing out shampoo and an invigorating head massage; the SmartRain Spray is wider for an energizing yet relaxing experience; and Rain Spray uses all the nozzles on the generous spray plate for full body coverage and a truly soothing shower.

SB 18-0032



# 自願參與用水效益標籤計劃 - 沐浴花灑 Voluntary Water Efficiency Labelling Scheme - Showers for Bathing



数證明 This is to certify that

# 將下列花灑在本計劃內註冊:

has registered the following shower under this scheme:

牌 子 / Brand

GROHE

型 號 / Model

26457000

原產地 / Country or Region Origin

Germany

在用水效益標籤上展示的標誌

Symbolic Presentation on the Water Efficiency Label

▲ 滴水點 Water droplet(s)

用水效益級別

Water Efficiency Grade

. 1

耗业倒

Water Consumption

7.9

公升/分鐘 litres/minute

簽發日期: Date of Issue:

14 February 2018





水務署署長(周世威代行) for Director of Water Supplies



# 自願參與用水效益標籤計劃 - 沐浴花灑 Voluntary Water Efficiency Labelling Scheme - Showers for Bathing



This is to certify that

將下列花灑在本計劃內註冊:

has registered the following shower under this scheme:

牌 子 / Brand

GROHE

型 號 / Model

275712XE

原產地 / Country or Region Origin

Germany

在用水效益標籤上展示的標誌

Symbolic Presentation on the Water Efficiency Label

│ 滴水點 Water droplet(s)

用水效益級別

Water Efficiency Grade

: 1

耗水量

Water Consumption

5.3

公升/分鐘 litres/minute

簽發日期: Date of Issue:

30 April 2018





水務署署長(周世威代行) for Director of Water Supplies



來函檔號

Your ref.

### 水務署 Water Supplies Department

经商益 Headquarters

告士打道七號入境事務大樓 48 樓

ation Tower, 7 Gloucester Road, Wan Chai, Hong Kong

署檔: D 3321/18 Pt.1 T/J(240)

電話

Tel.

傳真 For

: 2824 0578

6 September 2018

# Approval of "GROHE" Thermostatic Mixing Valves (General Acceptance No. C20180591)

Your letter ref. WRC/1650 dated 21 February 2018 and subsequent submission received by this department on 2 August 2018 refer.

Having considered the test report ref. J21968-2r2 issued on 26 July 2018 by Nutek Systems (HK) Ltd., this Authority accepts that the fittings described below comply with, and their use when correctly installed does not contravene, the Waterworks Ordinance and Regulations.

Name of Manufacturer:

Grohe AG

Country of Origin:

Germany

Brand:

Grohe

**Details of Fitting:** 

1/2" Concealed thermostatic mixing valve

Model:

35600000 + 29121000

35600000 + 29904LS0 35600000 + 29126000

35600000 + 29157LS0

**Body Markings:** 

GROHE





**Expiry Date:** 

23 October 2022

This Authority hereby permits the use of the above fittings in fresh water plumbing systems subject to full adherence to Waterworks installation requirements. In particular, you are required to draw your customers' attention to the following requirement-

> "The cold water supply to the fittings shall be drawn from the same source that supplies the hot water apparatus so as to provide a balanced pressure and to obviate the risk of scalding in the event of a restriction or failure in the water supply." AND

> "The shower head or handspray should not be placed in submerged conditions and should be securely fixed to the original position after use."

A condition of this acceptance is that the fittings to be installed shall be replicas of the samples as certified by the testing agent mentioned above and without modifications. This acceptance may be withdrawn at any time if the standard of the fittings installed fails to meet that of the approved samples or if the fittings are found to be unsuitable for use in fresh water plumbing systems.

This acceptance is only applicable to the main body of the fittings, unless other specified.

For the use of the fittings in any project, the General Acceptance Number of this letter must be quoted as a means of identification of acceptance of the fittings by this Authority.

Should you have any enquiries, please contact our Engineer Mr. Terry KUNG at tel. no. 3583 4086.

Yours faithfully,

(CHAN Chung-kun)

for Director of Water Supplies

Encl.

c.c. WSD 3321/1/82 ] - without catalogue ME/MC

] - with soft copy only