



Since 1949

Acme Sanitary Ware Co. Ltd.

1/F, Acme Building, 22-28 Nanking Street, Kowloon, Hong Kong


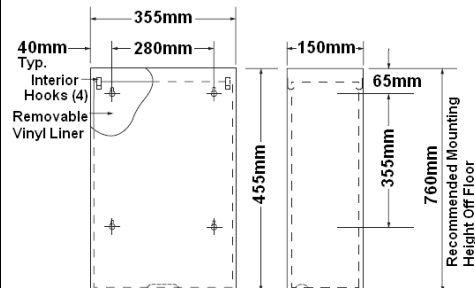
Tel: 2388 7171 Fax: 2710 8012

Email: acme@acmesanitary.com.hk

Website: www.acmesanitary.com.hk

PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

SANITARY WARE SPECIFICATION SHEET

Item Descriptions	Bobrick (USA) "Classic Series" Surface mounted waste receptacle	<div>Illustration/ Drawing</div> <div></div>
Dimensions	Refer to drawing	
Model	B-279	
Material/ Finish	Stainless Steel	
Manufacturer	Bobrick Washroom Equipment Inc. (USA)	
Supplier	Acme Sanitary Ware Co. Ltd Mr. Eric Wong/ Mr. Don Yuen	
Contact Tel/Fax E-mail Website	(852) 2388-7171 / (852) 2710-8012 acme@acmesanitary.com.hk www.acmesanitary.com.hk	
MATERIALS: Receptacle — 18-8, type-304 stainless steel with satin finish. Front and sides are one-piece, 22 gauge (0.8mm); back and bot-tom are one-piece, 26 gauge (0.5mm). All-welded construction. Top edge hemmed and bottom has recessed finger grip for safe handling. Equipped with four spot-welded interior hooks for attaching the vinyl liner. Capacity: 6.4-gal. (24.2-L). Liner — Heavy-gauge vinyl with four grommets. Removable for ser vicing.		
OPERATION: Removable vinyl liner attaches to four interior hooks of waste receptacle. Space between bottom of receptacle and floor, when unit is properly mounted on wall, facilitates floor cleaning.		
INSTALLATION: Mount unit on wall with four sheet-metal screws (not furnished) at points indicated by an S. For plaster or dr y wall construction, provide concealed backing to comply with local building codes, then secure unit with sheet-metal screws. For other wall surfaces, provide fiber plugs or expansion shields for use with sheet-metal screws, or provide 1/8" (3mm) toggle bolts or expansion bolts.		
SPECIFICATION: Surface-mounted waste receptacle shall be type-304 stainless steel with all-welded construction; exposed surfaces shall have satin finish. Front and sides of waste receptacle shall be one-piece, 22 gauge (0.8mm); back and bottom shall be one-piece, 26 gauge (0.5mm). Top edge shall be hemmed and bottom of waste receptacle shall have recessed finger grip. Waste receptacle shall be equipped with four interior hooks, furnished with a removable heavy-gauge vinyl liner, and shall have a minimum capacity of 6.4-gal. (24.2-L).		

Note:

* All information of the above is for the reference only. No prior notice is made if any changes.

Source: Bobrick Washroom Equipment Inc.