



**Acme Sanitary Ware Co. Ltd.**

1/F, Acme Building, 22-28 Nanking Street, Kowloon, Hong Kong

Tel: 2388 7171 Fax: 2710 8012



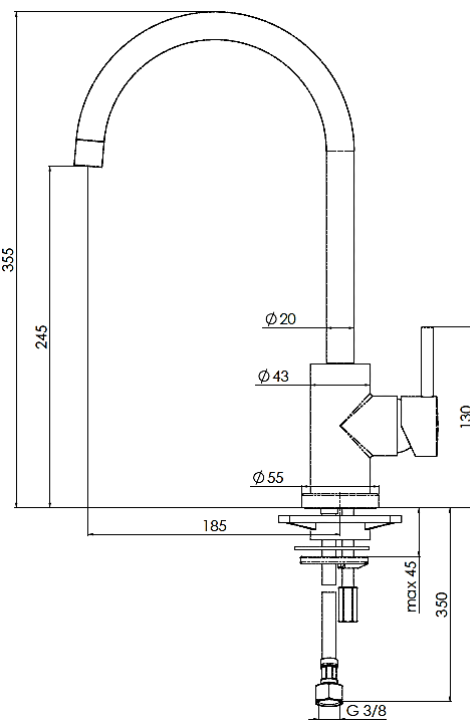
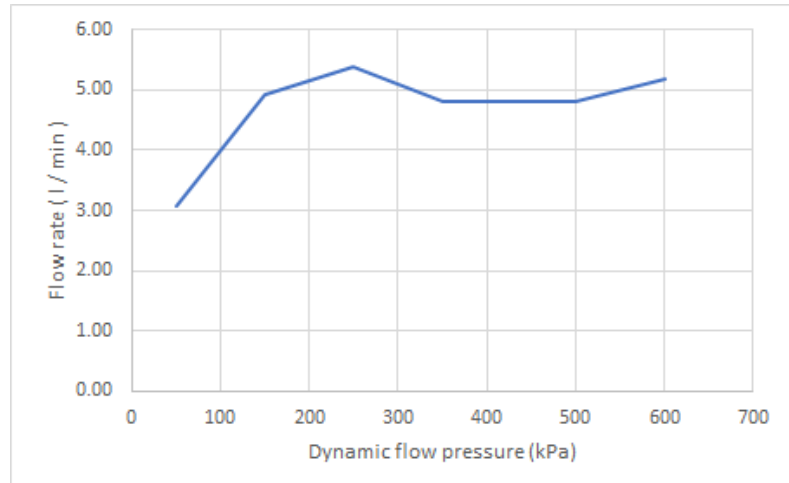
Email: acme@acmesanitary.com.hk

Website: www.acmesanitary.com.hk

**NOBILIS®**  
**RUBINETTERIE**

PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

## SANITARY WARE SPECIFICATION SHEET

Item Descriptions	Nobili (Italy) "Live" 355mm high single lever sink mixer; nominated flow rate <b>5 L/min</b> in WELS <b>Grade 1</b> ; Registration No. TM 18-0195	<div>Illustration/ Drawing</div> <div></div>														
Standard	QAVR (Italy) 															
Dimensions	L185 x W55 x H355 mm	<div></div>														
Model	LV00133CR (Mixer) 44.3051.000 (Aerator)															
Finish	Chrome Plated															
Manufacturer	Nobili (Italy)															
Source	Acme Sanitary Ware Co. Ltd Mr. Eric Wong/ Mr. Don Yuen															
Contact Tel/Fax	(852) 2388-7171 / (852) 2710-8012															
E-mail	acme@acmesanitary.com.hk															
Website	www.acmesanitary.com.hk															
<div><div><div>• Single control</div><div>• Chrome</div><div>• 360° swivel spout</div></div><div><div>• Anti limescale aerator M 16 x 1</div><div>• ø 3/8" stainless steel flexible pipe</div><div>• 50% two step cartridge for water saving</div></div></div>																
<div><div></div><table><tr><td>Dynamic flow pressure (kPa)</td><td>50</td><td>150</td><td>250</td><td>350</td><td>500</td><td>600</td></tr><tr><td>Flow rate (l/min)</td><td>3.08</td><td>4.93</td><td>5.40</td><td>4.80</td><td>4.80</td><td>5.19</td></tr></table></div>		Dynamic flow pressure (kPa)	50	150	250	350	500	600	Flow rate (l/min)	3.08	4.93	5.40	4.80	4.80	5.19	
Dynamic flow pressure (kPa)	50	150	250	350	500	600										
Flow rate (l/min)	3.08	4.93	5.40	4.80	4.80	5.19										

Note:

\* All information of the above is for the reference only. No prior notice is made if any changes.

註冊號碼 (Registration No.): TM 18-0195



自願參與用水效益標籤計劃 - 水龍頭  
Voluntary Water Efficiency Labelling Scheme - Water Taps



茲證明

This is to certify that

Acme Sanitary Ware Co. Ltd.

將下列水龍頭在本計劃內註冊：  
has registered the following water tap under this scheme :

牌 子 / Brand	:	NOBILI
型 號 / Model	:	LV00133 CR + 44.3051.000
種 類 / Type	:	Mixing
原產地 / Country or Region Origin	:	Italy

在用水效益標籤上展示的標誌

*Symbolic Presentation on the Water Efficiency Label*



滴水點

*Water droplet(s)*

用水效益級別

*Water Efficiency Grade*

: 1

耗水量

*Water Consumption*

: 5

公升/分鐘

*litres/minute*

簽發日期：  
Date of Issue:

6 August 2018



水務署

Water Supplies Department



水務署署長(鍾兆榮代行)  
for Director of Water Supplies



水務署  
Water Supplies Department

總部 Headquarters

灣仔告士打道七號入境事務大樓 48 樓

Immigration Tower, 7 Gloucester Road, Wan Chai, Hong Kong

本署  
Our  
來函檔  
Your ref.



3321/2020 T/J(1572/2020)

電話 :  
Tel.  
傳真 : 2824 0578  
Fax.

18 January 2021

Acme Sanitary Ware Co. Ltd.  
1/F, Acme Building,  
22-28 Nanking Street,  
Kowloon, Hong Kong

(Attn.: Mr Perry CHOW)

Dear Sir,

**Approval of "NOBILI" Sink Mixer  
(General Acceptance No. C20210038)**

Your letters ref. L029/2020 and L037/2020 dated 27 November 2020 and 23 December 2020 respectively refer.

Having considered the test report ref. J25720 issued on 10 November 2020 by Nutek Systems (HK) Ltd., this Authority accepts that the fitting described below complies with, and its use when correctly installed does not contravene, the Waterworks Ordinance and Regulations.

**Name of Manufacturer:** Carlo Nobili SpA Rubinetterie

**Country of Origin:** Italy

**Brand:** Nobili

**Details of Fitting:** 3/8" Single lever sink mixer

**Model:** LV00133CR

**Body Markings:** **NOBILI**

**Expiry Date:** 26 October 2025





This Authority hereby permits the use of the above fitting in fresh water plumbing systems subject to full adherence to Waterworks installation requirements. In particular, you are required to draw your customers' attention to the following requirement-

"The cold water supply to the fitting shall be drawn from the same source that supplies the hot water apparatus so as to provide a balanced pressure and to obviate the risk of scalding in the event of a restriction or failure in the water supply."

A condition of this acceptance is that the fitting to be installed shall be replicas of the sample as certified by the testing agent mentioned above and without modifications. This acceptance may be withdrawn at any time if the standard of the fitting installed fails to meet that of the approved sample or if the fitting is found to be unsuitable for use in fresh water plumbing systems.

This acceptance is only applicable to the main body of the fitting, unless otherwise specified.

For the use of the fitting in any project, the General Acceptance Number of this letter must be quoted as a means of identification of acceptance of the fitting by this Authority.

Should you have any enquiries, please contact our Engineer Mr. Terry KUNG at tel. no. 3583 4086.

Yours faithfully,



(CHAN Chung-kun)

for Director of Water Supplies

Encl.

c.c.      WSD 3321/1/82    ] - without catalogue  
             ME/MC            ] - with soft copy only