



PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

SANITARY WARE SPECIFICATION SHEET

Item Descriptions	GROHE (Germany) "Eurocube" Chrome plated single-lever bath & shower mixer with 2-way diverter
Dimensions	L158 x W154 x H204 mm
Model	24062000 (Bath & shower mixer) 35600000 (Mounting box)
Finish	Chrome Plated
Country of origin	Germany
Manufacturer	GROHE Limited
Supplier	Acme Sanitary Ware Co. Ltd Mr. Eric Wong/ Mr. Don Yuen
Contact Tel/Fax	(852) 2388-7171 / (852) 2710-8012
E-mail	acme@acmesanitary.com.hk
Website	www.acmesanitary.com.hk

Illustration/ Drawing

"Eurocube"
Single-lever mixer with 2-way diverter

- set for final installation for
- GROHE Rapido SmartBox 35 600
- **GROHE SilkMove** 46 mm ceramic cartridge
- **GROHE StarLight** chrome finish
- wall escutcheon with **GROHE QuickFix** (covered escutcheon- and shaft sealing, covered fixing)
- metal escutcheon, retroactively 6° adjustable
- metal lever
- **automatic 2-way diverter**
- flow performance:
outlet B = 27 l/min,
outlet C = 27 l/min
- **without roughing-in-set**

"GROHE Rapido SmartBox "
Universal rough-in box, 1/2 "

- 3 outlets 1/2"
- 2 inlets below, 1/2"
- installation depth 75-105 mm
- connection unit in DR brass
- pre-mounted flushing plug
- stable build-in box and protective cover
- fixing options for solid walls and dry cladding
- gasket
- without set for final installation

Colour options:

- 000 | StarLight Chrome
- DC0 | SuperSteel
- AL0 | Brushed Hard Graphite

24062DC0 24062AL0

<p>"Eurocube" Single-lever mixer with 2-way diverter</p> <ul style="list-style-type: none"> · set for final installation for · GROHE Rapido SmartBox 35 600 · GROHE SilkMove 46 mm ceramic cartridge · GROHE StarLight chrome finish · wall escutcheon with GROHE QuickFix (covered escutcheon- and shaft sealing, covered fixing) · metal escutcheon, retroactively 6° adjustable · metal lever · automatic 2-way diverter · flow performance: outlet B = 27 l/min, outlet C = 27 l/min · without roughing-in-set 	<p>"GROHE Rapido SmartBox " Universal rough-in box, 1/2 "</p> <ul style="list-style-type: none"> · 3 outlets 1/2" · 2 inlets below, 1/2" · installation depth 75-105 mm · connection unit in DR brass · pre-mounted flushing plug · stable build-in box and protective cover · fixing options for solid walls and dry cladding · gasket · without set for final installation
---	---

Note: YouTube ^{HK} ([Rapido SmartBox | Installation Video](https://www.youtube.com/watch?v=KsWdVrq9fVI)) <https://www.youtube.com/watch?v=KsWdVrq9fVI>

* All information of the above is for the reference only. No prior notice is made if any changes.



Acme Sanitary Ware Co Ltd

Acme Building, 22-28 Nanking Street, Kowloon, Hong Kong
Tel: 2388 7171 Fax: 2710 8012
E-mail: acme@acmesanitaryware.com.hk
Website: www.acmesanitaryware.com.hk




Pure Freude
an Wasser

PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

SANITARY WARE SPECIFICATION SHEET




THE NEW GROHE RAPIDO SMARTBOX
A UNIVERSAL SYSTEM FOR INFINITE POSSIBILITIES



MORE THAN 200 POSSIBLE COMBINATIONS WITH GROHE RAPIDO SMARTBOX

As concealed mixing valves for showers and bathtubs are becoming increasingly successful, concealed units are in great demand. With its minimum installation depth of only 75mm, GROHE's Rapido Smartbox can be easily installed for all showers/bathtubs. The Rapido Smartbox concealed body allows you to control up to three water outlets and is compatible with all GROHE concealed models.

GROHE StarLight®

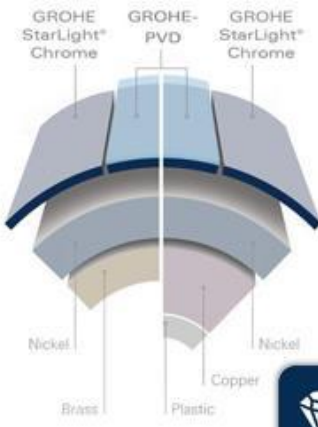



GROHE StarLight® Chrome
GROHE-PVD
GROHE StarLight® Chrome

Nickel
Brass
Plastic
Copper

GROHE surface hardness
Chrome PVD **×3**

GROHE scratch resistance
Chrome PVD **×10**

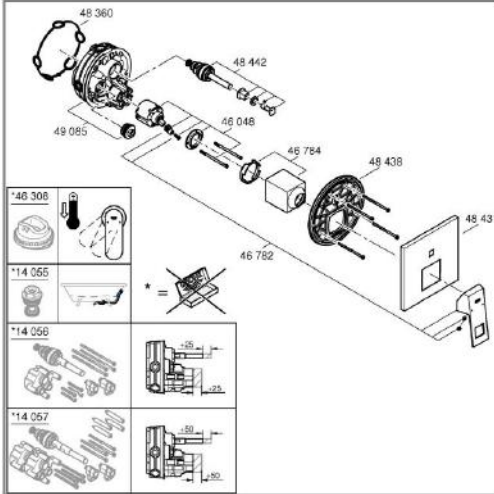



GROHE QuickFix Plus quick and easy installation in a few simple steps

Save time on the installation of your tap with GROHE QuickFix Plus. Consisting of fewer parts, our new system makes the installation process quicker and easier than ever.

GROHE SilkMove cartridge technology for smooth handling

This premium tap comes with a continuously variable water temperature and volume adjustment technology, ensuring effortless lever operation even after years of use.

Note:

* All information of the above is for the reference only. No prior notice is made if any changes.



Acme Sanitary Ware Co Ltd

Acme Building, 22-28 Nanking Street, Kowloon, Hong Kong
Tel: 2388 7171 Fax: 2710 8012
E-mail: acme@acmesanitary.com.hk
Website: www. acmesanitaryware.com.hk



Pure Freude
an Wasser

PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

SANITARY WARE SPECIFICATION SHEET

Just one plumber-friendly rough-in for entire range

2

1

3

Three outlets for a wider range of shower options

Efficient installation thanks to bottom inlets

Exchangeable function units for single-lever mixers, thermostats and SmartControl, fully pre-configured and 100% factory tested

All thermostats with retrofit service stops

Subsequently adjustable by up to six degrees: ensures that the wall plate is always in level and allows for perfect alignment with tile joints

75mm

Note:

* All information of the above is for the reference only. No prior notice is made if any changes.