



**Acme Sanitary Ware Co. Ltd.**

1/F, Acme Building, 22-28 Nanking Street, Kowloon, Hong Kong

Tel: 2388 7171 Fax: 2710 8012

Email: acme@acmesanitary.com.hk



Website: www.acmesanitary.com.hk

**SIAMP**

PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			LEGEND	

## SANITARY WARE SPECIFICATION SHEET

Item Descriptions	Siamp (Vietnam) "HANDY" 1/2" <b>extractable</b> and <b>extendable</b> bottom inlet valve fitting	Illustration/ Drawing
Dimensions	Refer to drawing	
Model	93T	
Material	Plastic	
Manufacturer	Siamp	
Source	Acme Sanitary Ware Co. Ltd Mr. Eric Wong/ Mr. Don Yuen	
Contact Tel/Fax	(852) 2388-7171 / (852) 2710-8012	
E-mail	acme@acmesanitary.com.hk	
Website	www.acmesanitary.com.hk	

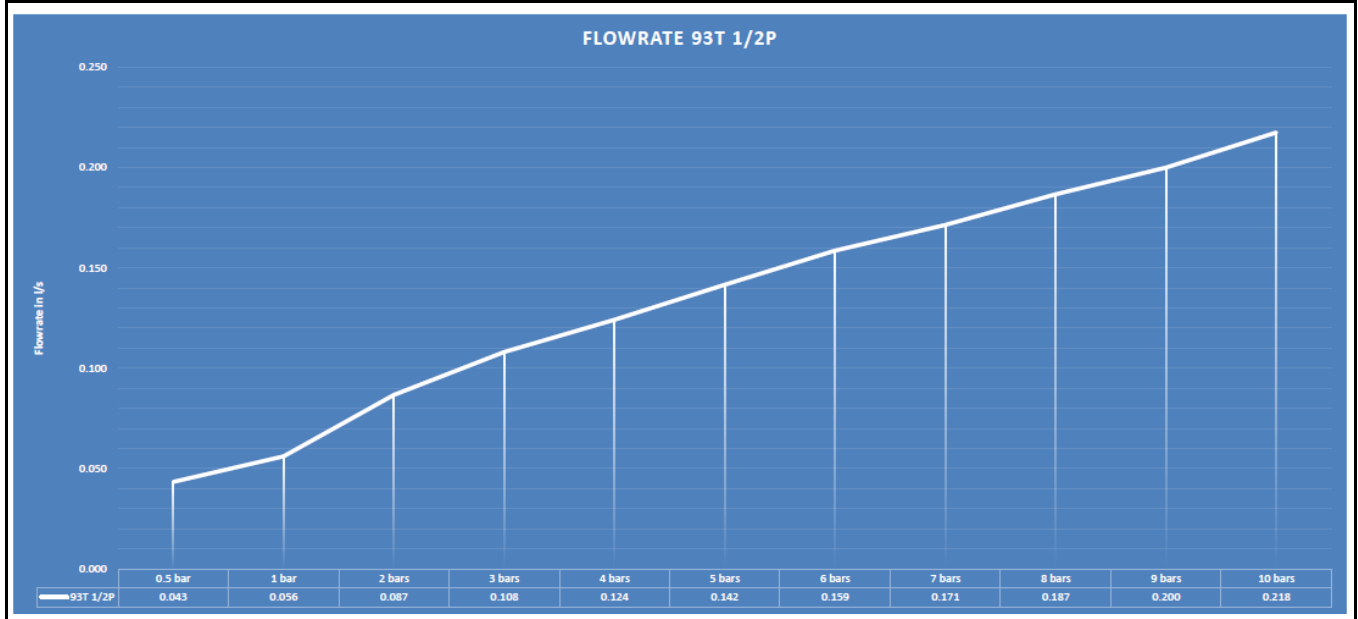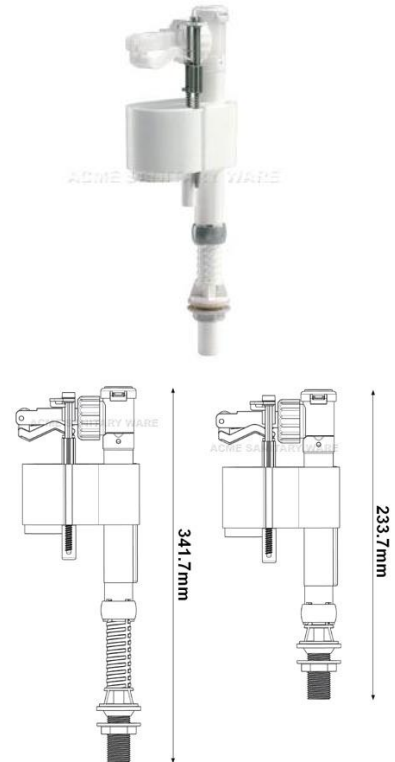

Note:

- 1) Extractable
- 2) Extendable
- 3) Torque requirement : 4N/meter

Any excess the torque requirement may cause the damage.

\* All information of the above is for the reference only. No prior notice is made if any changes.



水務署  
Water Supplies Department

總部 Headquarters



上打道七號入境事務大樓 48 樓

7 Gloucester Road, Wan Chai, Hong Kong

本署檔號  
Our ref.  
來函檔號  
Your ref.

21/2020 T/J(950/2020)

電話  
Tel.  
傳真  
Fax.

: 2824 0578

15 September 2020



Dear Sir/Madam,

**Approval of "SIAMP" Float Operated Valve  
(General Acceptance No. C20200807F)**

Your letter dated 22 June 2020 refers.

Having considered the test report ref. 200331ST200057 issued on 26 March 2020 by Fugro Technical Services Limited, this Authority accepts that the fitting described below complies with, and its use when correctly installed does not contravene, the Waterworks Ordinance and Regulations.

**Name of Manufacturer:** SIAMP Ltd  
**Country of Origin:** Vietnam  
**Brand:** SIAMP  
**Details of Fitting:** 1/2" Plastic float operated valve  
**Model:** 93T  
**Body Markings:** SIAMP  
**Expiry Date:** 16 March 2025

**Proviso:** As the fitting has not been tested for use in contact with water intended for human consumption, the fitting can only be used in flushing water plumbing system.

This Authority hereby permits the use of the above fitting in flushing water plumbing systems subject to full adherence to Waterworks installation requirements. In particular, you are required to draw your customers' attention to the following requirement-

"The flushing volume of the flushing valve should be adjusted to suit the design of the toilet bowl so that wastes can be cleared effectively by a single flush."

"The fitting should be used within the range of working pressures specified by the manufacturer." AND

"The installed fitting should not result in backflow of water that will contaminate the flushing water supply."

A condition of this acceptance is that the fitting to be installed shall be replicas of the sample as certified by the testing agent mentioned above and without modifications. This acceptance may be withdrawn at any time if the standard of the fitting installed fails to meet that of the approved sample or if the fitting is found to be unsuitable for use in flushing water plumbing systems.

For the use of the fitting in any project, the General Acceptance Number of this letter must be quoted as a means of identification of acceptance of the fitting by this Authority.

Should you have any enquiries, please contact our Engineer Mr. Terry KUNG at tel. no. 3583 4086.

Yours faithfully,



(CHAN Chung-kun)

for Director of Water Supplies

Encl.

c.c.      WSD 3321/1/82    ] - without catalogue  
              ME/MC            ] - with soft copy only