



Acme Sanitary Ware Co. Ltd.

1/F, Acme Building, 22-28 Nanking Street, Kowloon, Hong Kong


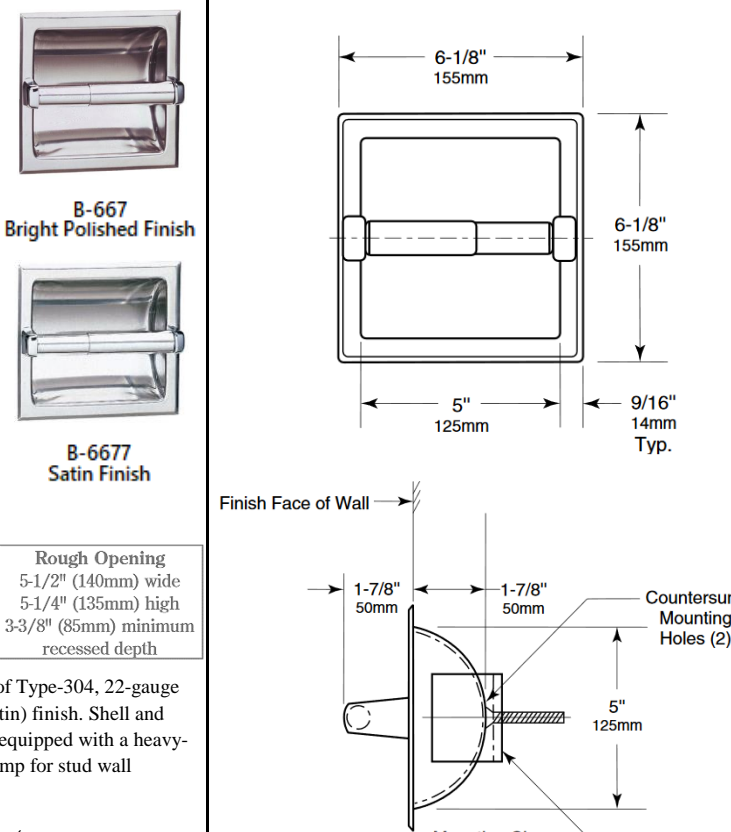
Tel: 2388 7171 Fax: 2710 8012

Email: acme@acmesanitary.com.hk

Website: www.acmesanitary.com.hk

| | | | | | | |
|----------|--|------|--|-----|-----------|--|
| PROJECT | | REF | | REV | ITEM CODE | |
| LOCATION | | DATE | | | PAGE | |

SANITARY WARE SPECIFICATION SHEET

| | |
|---|--|
| <p>Item Descriptions</p> <p>Bobrick (USA) Stainless steel recessed roll toilet tissue dispenser in bright polished finish</p> | <p>Illustration/ Drawing</p>  |
| <p>Dimensions</p> <p>L155 x W100 x H155 mm</p> | |
| <p>Model</p> <p>B-667</p> | |
| <p>Material/ Finish</p> <p>Stainless Steel / Bright Polished Finish</p> | |
| <p>Manufacturer</p> <p>Bobrick Washroom Equipment Inc. (USA)</p> | |
| <p>Supplier</p> <p>Acme Sanitary Ware Co. Ltd Mr. Eric Wong/ Mr. Don Yuen</p> | |
| <p>Contact Tel/Fax</p> <p>(852) 2388-7171 / (852) 2710-8012</p> | |
| <p>E-mail</p> <p>acme@acmesanitary.com.hk</p> | |
| <p>Website</p> <p>www.acmesanitary.com.hk</p> | |
| <p>MATERIALS:</p> <p>Shell and Flange — 18-8, Type-304, 22-gauge (0.8mm) stainless steel. Drawn, one-piece, seamless construction with two countersunk mounting holes.</p> <p>Support Posts (2) — Heavy-duty cast zamak with chrome-plated finish. Mounting Bracket — Plated steel mounting clamp attaches to back of unit with two sheet-metal screws for installation in stud wall construction and countertop aprons.</p> <p>Spindle — Chrome-plated plastic equipped with heavy-duty internal spring.</p> <p>*Theft-resistant toilet tissue spindle, which is removable only with special key provided, are available as an optional accessory - part no. 283-604.</p> <p>INSTALLATION:</p> <p>Provide framed rough opening 5-1/2" wide x 5-1/4" high (140 x 135mm). Minimum recessed depth required from finish face of wall or apron is 3-3/8" (85mm).</p> <p>For installation in stud wall construction and countertop aprons without backing: Loosely attach mounting clamp to back of unit with sheet-metal mounting screws. Insert into rough opening. Adjust mounting clamp so it grips surface inside rough opening. Secure in place by tightening two sheet-metal mounting screws.</p> <p>For installation in stud wall construction and countertop aprons with backing: Discard mounting clamp furnished with unit. Insert unit only into rough opening and secure with sheet-metal screws furnished. Backing must comply with local building codes.</p> <p>SPECIFICATION: Recessed toilet tissue dispenser shall be constructed of Type-304, 22-gauge (0.8mm) stainless steel with _____ (insert one: bright polished or satin) finish. Shell and flange shall be drawn, one-piece, seamless construction. *Spindle shall be equipped with a heavy-duty internal spring. Unit shall be furnished with plated steel mounting clamp for stud wall construction and countertop aprons.</p> <p><i>*Theft-resistant spindle (part No. 283-604) available as a replacement part.</i></p> |  <p>B-667 Bright Polished Finish</p> <p>B-6677 Satin Finish</p> <p>Rough Opening 5-1/2" (140mm) wide 5-1/4" (135mm) high 3-3/8" (85mm) minimum recessed depth</p> <p>Finish Face of Wall</p> <p>Countersunk Mounting Holes (2)</p> <p>Mounting Clamp</p> |

Note:

* All information of the above is for the reference only. No prior notice is made if any changes.

Source: Bobrick Washroom Equipment Inc.