



Acme Sanitary Ware Co. Ltd.

1/F, Acme Building, 22-28 Nanking Street, Kowloon, Hong Kong

Tel: 2388 7171 Fax: 2710 8012



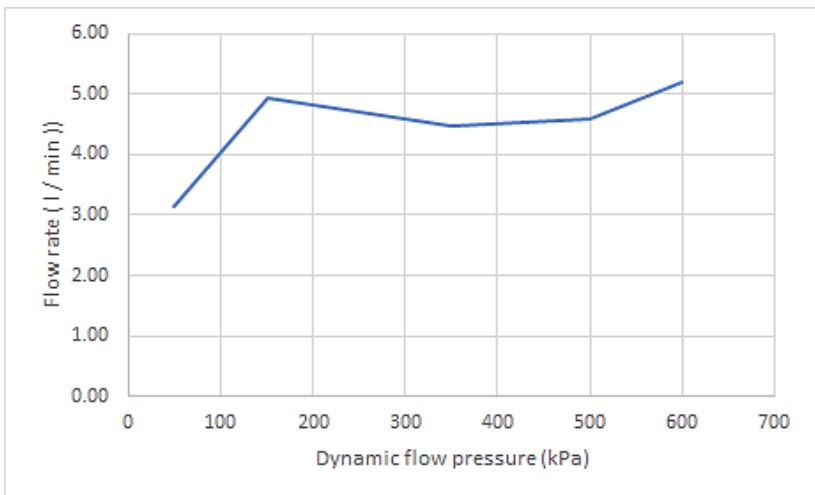
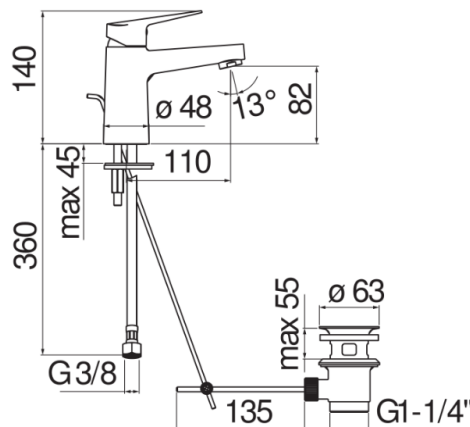
Email: acme@acmesanitary.com.hk

Website: www.acmesanitary.com.hk

NOBILIS®
RUBINETTERIE

PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

SANITARY WARE SPECIFICATION SHEET

Item Descriptions	Nobili (Italy) "Blues" Single lever basin mixer; nominated flow rate 4.7 L/min in WELS Grade 1 ; Registration No. TM 18-0194	Illustration/ Drawing														
Standard	QAVR (Italy) 															
Dimensions	L110 x W50 x H140 mm															
Model	BS101118/1 CR 40.2051.00001 (Aerator)															
Finish	Chrome Plated Brass															
Manufacturer	Nobili (Italy)															
Source	Acme Sanitary Ware Co. Ltd Mr. Eric Wong/ Mr. Don Yuen															
Contact Tel/Fax	(852) 2388-7171 / (852) 2710-8012															
E-mail	acme@acmesanitary.com.hk															
Website	www.acmesanitary.com.hk															
<div><div><ul style="list-style-type: none">• Single control• Chrome</div><div><ul style="list-style-type: none">• Anti limescale aerator M 24 x 1• 1 1/4" waste with patented SNAP system• ø 3/8" stainless steel flexible pipe• 50% two step cartridge for water saving</div></div>																
<div><div></div><div></div></div>																
<table><tr><td>Dynamic flow pressure (kPa)</td><td>50</td><td>150</td><td>250</td><td>350</td><td>500</td><td>600</td></tr><tr><td>Flow rate (l/min)</td><td>3.13</td><td>4.95</td><td>4.70</td><td>4.48</td><td>4.60</td><td>5.19</td></tr></table>			Dynamic flow pressure (kPa)	50	150	250	350	500	600	Flow rate (l/min)	3.13	4.95	4.70	4.48	4.60	5.19
Dynamic flow pressure (kPa)	50	150	250	350	500	600										
Flow rate (l/min)	3.13	4.95	4.70	4.48	4.60	5.19										

* All information of the above is for the reference only. No prior notice is made if any changes.



自願參與用水效益標籤計劃 - 水龍頭
Voluntary Water Efficiency Labelling Scheme - Water Taps



茲證明

This is to certify that

Acme Sanitary Ware Co. Ltd.

將下列水龍頭在本計劃內註冊：
has registered the following water tap under this scheme :

牌子 / Brand	:	NOBILI
型號 / Model	:	BS101118/1 CR + 40.2051.00001
種類 / Type	:	Mixing
原產地 / Country or Region Origin	:	Italy

在用水效益標籤上展示的標誌

Symbolic Presentation on the Water Efficiency Label

:



滴水點

Water droplet(s)

用水效益級別

Water Efficiency Grade

:

1

耗水量

Water Consumption

:

4.7

公升/分鐘

litres/minute

簽發日期：
Date of Issue:

6 August 2018



水務署

Water Supplies Department



水務署署長(鍾兆榮代行)
for Director of Water Supplies



水務署
Water Supplies Department

總部 Headquarters

香港灣仔告士打道七號入境事務大樓 48 樓

7 Gloucester Road, Wan Chai, Hong Kong



本署檔
Our ref.
來函檔號
Your ref.

21/2020 T/J(1075/2020)

電話 :
Tel.
傳真 : 2824 0578
Fax.

23 September 2020

Acme Sanitary Ware Co. Ltd.
1/F, Acme Building,
22-28 Nanking Street,
Kowloon, Hong Kong

(Attn.: Mr Perry CHOW)

Dear Sir,



**Approval of "NOBILI" Basin Mixer
(General Acceptance No. C20200834)**

Your letter ref. L022/2020 dated 17 August 2020 refers.

Having considered the test report ref. J25444 issued on 4 August 2020 by Nutek Systems (HK) Ltd., this Authority accepts that the fitting described below complies with, and its use when correctly installed does not contravene, the Waterworks Ordinance and Regulations.

Name of Manufacturer: Carlo Nobili SpA Rubinetterie

Country of Origin: Italy

Brand: Nobili

Details of Fitting: 3/8" Single lever basin mixer

Model: BS101118/1CR

Body Markings: **NOBILI**

Expiry Date: 13 July 2025

This Authority hereby permits the use of the above fitting in fresh water plumbing systems subject to full adherence to Waterworks installation requirements. In particular, you are required to draw your customers' attention to the following requirement-

"The cold water supply to the fitting shall be drawn from the same source that supplies the hot water apparatus so as to provide a balanced pressure and to obviate the risk of scalding in the event of a restriction or failure in the water supply."

A condition of this acceptance is that the fitting to be installed shall be replicas of the sample as certified by the testing agent mentioned above and without modifications. This acceptance may be withdrawn at any time if the standard of the fitting installed fails to meet that of the approved sample or if the fitting is found to be unsuitable for use in fresh water plumbing systems.

This acceptance is only applicable to the main body of the fitting, unless otherwise specified.

For the use of the fitting in any project, the General Acceptance Number of this letter must be quoted as a means of identification of acceptance of the fitting by this Authority.

Should you have any enquiries, please contact our Engineer Mr. Terry KUNG at tel. no. 3583 4086.

Yours faithfully,



(CHAN Chung-kun)

for Director of Water Supplies

Encl.

c.c. WSD 3321/1/82] - without catalogue
 ME/MC] - with soft copy only