



Acme Sanitary Ware Co. Ltd.

1/F, Acme Building, 22-28 Nanking Street, Kowloon, Hong Kong

Tel: 2388 7171 Fax: 2710 8012


Email: acme@acmesanitary.com.hk

Website: www.acmesanitary.com.hk

American Standard

PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

SANITARY WARE SPECIFICATION SHEET

Item Descriptions	American Standard (PRC) "EasySET" innovative exposed push button thermostatic shower mixer to provide the space flexibility and ease of use ; chrome plated shower head and 3 functions hand spray ; built-in two side hooks ; nominated flow rate 7.4 & 8.1 L/min in WELS Grade 1 ; Registration No. SB 17-0023 & SB 19-0117					<div>Illustration/ Drawing</div> 												
Model	FFAS4955-701500BC0																	
Finish	Chrome Plated																	
Manufacturer	American Standard (PRC)																	
Supplier	Acme Sanitary Ware Co. Ltd Mr. Eric Wong/ Mr. Don Yuen																	
Contact Tel/Fax	(852) 2388-7171 / (852) 2710-8012																	
E-mail	acme@acmesanitary.com.hk																	
Website	www.acmesanitary.com.hk																	
FEATURES German thermostatic cartridge Anti-scald safestop button Push button cartridge with flow rate adjustable from Japan, lifecycle≥300,000 times Plastic body with cool touch design,no risk of scalding on the body Designed with a shelf space for storage Side Hook on both side,as a shower accessories and drain the water on the top of the surface																		
PUSH Imagine a rejuvenating shower experience as intuitive and simple as breathing. From the cascading water from the Rainshower to the invigorating Hand Shower, all activated individually with a simple push of a button.																		
TURN Be in total control of both the temperature and volume of the water to create your own perfect shower. Choose a stronger flow of water to ease muscle tensions or a more sensuous flow for that relaxing spa-like pampering. All with an easy turn of the dial																		
Hand Shower																		
<table><tr><td>Dynamic flow pressure (kPa)</td><td>50</td><td>150</td><td>250</td><td>350</td><td>500</td></tr><tr><td>Flow rate (l/min)</td><td>2.53</td><td>5.33</td><td>6.88</td><td>7.55</td><td>8.30</td></tr></table>						Dynamic flow pressure (kPa)	50	150	250	350	500	Flow rate (l/min)	2.53	5.33	6.88	7.55	8.30	
Dynamic flow pressure (kPa)	50	150	250	350	500													
Flow rate (l/min)	2.53	5.33	6.88	7.55	8.30													

* All information of the above is for the reference only. No prior notice is made if any changes.



Acme Sanitary Ware Co. Ltd.

1/F, Acme Building, 22-28 Nanking Street, Kowloon, Hong Kong

Tel: 2388 7171 Fax: 2710 8012

Email: acme@acmesanitary.com.hk

Website: www.acmesanitary.com.hk

American Standard


PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

SANITARY WARE SPECIFICATION SHEET

American Standard

SafeStop button

- Limits temperature selection at 38°C, depress button to select higher temperature
- Button is located on the bottom of the handle

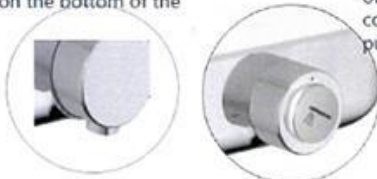

Push & Turn

- Dial adjusts water volume easily and offers daily convenience at the push of a button

Cool Surface (CoolShield)

- No risk of scalding on the body



Intuitive Graphics

- improved intuitive graphics on the button

Side Hook

- Use to hang shower accessories and drain the water on the top of the surface
- Load up to 1.5 KG



SpaceCreate

- Designed with a shelf space to hold toiletries and accessories.

ThermoComfort

- Provides a constant and comfortable temperature.

ThermoSafe

- Safety temperature control up to 49°C, with an auto shut-off function when cold water supply fails.



EASYGLIDE

No more fumbling moments with the hand shower holder that allows you to adjust its height in just one fluid twist-and-go movement.

Small in Details.
Big on Function.

AIRNEGIZE

Thanks to our thoughtful Airnegize technology that infuses water droplets with air, you will be wrapped in a luxurious shower spray while using lesser water.

Note:

* All information of the above is for the reference only. No prior notice is made if any changes.



Acme Sanitary Ware Co. Ltd.

1/F, Acme Building, 22-28 Nanking Street, Kowloon, Hong Kong

Tel: 2388 7171 Fax: 2710 8012

Email: acme@acmesanitary.com.hk

Website: www.acmesanitary.com.hk

American Standard

PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

SANITARY WARE SPECIFICATION SHEET



PUSH & TURN

Dial adjusts water volume easily and offers daily convenience at the push of a button.



THERMOCOMFORT

Provides a constant and comfortable temperature.



EASYGLIDE

Hand shower holder that allows you to easily adjust its height, single-handedly.



THERMOSAFE

Safety temperature control up to 49°C, with an auto shut-off function when cold water supply fails.



EASYCLICK

An instinctive button for switching between spray modes.



SPACECREATE

Creates extra usable space in the bathroom.



SWIVEL 360°

360° spout provides space flexibility and ease of use.



AIRNERGIZE

Air-infused water provides a luxurious shower experience while using lesser water.



COOLSHIELD

Body of faucet stays cool and prevents scalding shocks.



Note:

* All information of the above is for the reference only. No prior notice is made if any changes.



Acme Sanitary Ware Co. Ltd.

1/F, Acme Building, 22-28 Nanking Street, Kowloon, Hong Kong

Tel: 2388 7171 Fax: 2710 8012

Email: acme@acmesanitary.com.hk

Website: www.acmesanitary.com.hk





American Standard

PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

SANITARY WARE SPECIFICATION SHEET

Hand Shower

Dynamic flow pressure (kPa)	50	150	250	350	500
Flow rate (l/min)	2.53	5.33	6.88	7.55	8.30

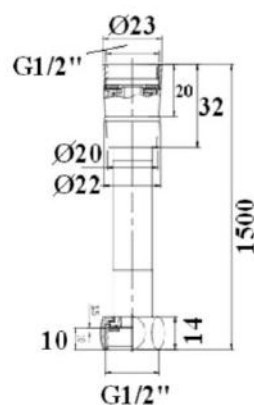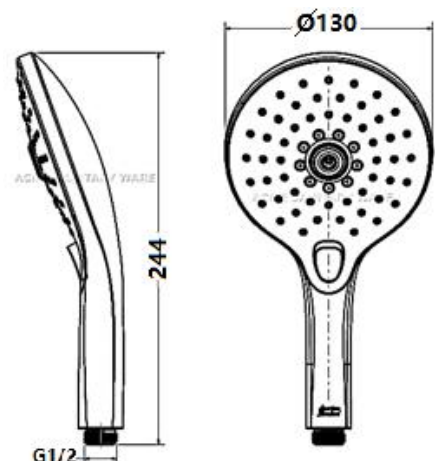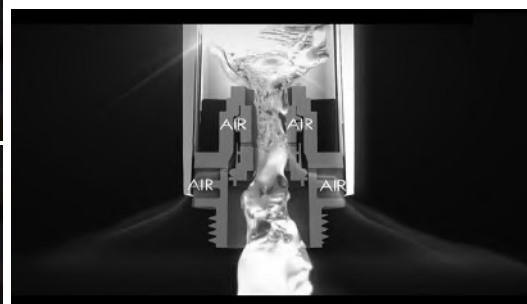

EASYCLICK

With a simple push of a button, you can easily switch between 3 spray functions for an indulgent shower of your choice.

<https://www.youtube.com/watch?v=SLncQdPEw6s>

* All information of the above is for reference only. No prior notice is made if any changes.

註冊號碼 (Registration No.): SB 17-0023




自願參與用水效益標籤計劃 - 沐浴花灑
Voluntary Water Efficiency Labelling Scheme - Showers for Bathing



茲證明
This is to certify that

將下列花灑在本計劃內註冊：
has registered the following shower under this scheme :

牌 子 / Brand	:	American Standard
型 號 / Model	:	FFAS9H11-000500BC0
原產地 / Country or Region Origin	:	China

在用水效益標籤上展示的標誌 <i>Symbolic Presentation on the Water Efficiency Label</i>	:	 滴水點 <i>Water droplet(s)</i>
用水效益級別 <i>Water Efficiency Grade</i>	:	1
耗水量 <i>Water Consumption</i>	:	6.6 公升/分鐘 <i>litres/minute</i>

簽發日期:
Date of Issue: 28 August 2017



水務署
Water Supplies Department



水務署署長(周世威代行)
for Director of Water Supplies




自願參與用水效益標籤計劃 - 沐浴花灑
Voluntary Water Efficiency Labelling Scheme - Showers for Bathing



茲證明
This is to certify that

將下列花灑在本計劃內註冊：
has registered the following shower under this scheme :

牌 子 / Brand	:	American Standard
型 號 / Model	:	FF1-CN521H0005650P
原產地 / Country or Region Origin	:	China

在用水效益標籤上展示的標誌 <i>Symbolic Presentation on the Water Efficiency Label</i>	:	 滴水點 <i>Water droplet(s)</i>
用水效益級別 <i>Water Efficiency Grade</i>	:	1
耗水量 <i>Water Consumption</i>	:	8.1 公升/分鐘 <i>litres/minute</i>

簽發日期:
Date of Issue: 27 December 2019



水 務 署
Water Supplies Department



水務署署長(張業駒代行)
for Director of Water Supplies



水務署
Water Supplies Department

總部 Headquarters

香港灣仔告士打道七號入境事務大樓 48 樓

48/F, Immigration Tower, 7 Gloucester Road, Wan Chai, Hong Kong

本署檔
Our r
來函
Your



3321/19 T/J(595/2019)

電話

Tel.

傳真

Fax.

: 2824 0578

28 February 2020



Approval of "AMERICAN STANDARD" Shower Mixer
(General Acceptance No. C20200114)

Your letter ref. WRC/2077 dated 18 June 2019 and subsequent submissions received by this department up to 20 January 2020 refer.

Having considered the test report ref. J24045r5 issued on 12 December 2019 by Nutek Systems (HK) Ltd., this Authority accepts that the fitting described below complies with, and its use when correctly installed does not contravene, the Waterworks Ordinance and Regulations.

Name of Manufacturer: American Standard

Country of Origin: the Mainland of China

Brand: American Standard

Details of Fitting: 1/2" Thermostatic shower mixer

Model: FFAS4955-701500BX0
(where the digit "X" denotes the code of region)

Body Markings: *American Standard*

Expiry Date: 6 May 2024



This Authority hereby permits the use of the above fitting in fresh water plumbing systems subject to full adherence to Waterworks installation requirements. In particular, you are required to draw your customers' attention to the following requirement-

"The cold water supply to the fitting shall be drawn from the same source that supplies the hot water apparatus so as to provide a balanced pressure and to obviate the risk of scalding in the event of a restriction or failure in the water supply." AND

"The shower head or handspray should not be placed in submerged conditions and should be securely fixed to the original position after use."

A condition of this acceptance is that the fitting to be installed shall be replicas of the sample as certified by the testing agent mentioned above and without modifications. This acceptance may be withdrawn at any time if the standard of the fitting installed fails to meet that of the approved sample or if the fitting is found to be unsuitable for use in fresh water plumbing systems.

This acceptance is only applicable to the main body of the fitting, unless otherwise specified.

For the use of the fitting in any project, the General Acceptance Number of this letter must be quoted as a means of identification of acceptance of the fitting by this Authority.

Should you have any enquiries, please contact our Engineer Mr. Terry KUNG at tel. no. 3583 4086.

Yours faithfully,



(CHAN Chung-kun)

for Director of Water Supplies

Encl.

c.c. WSD 3321/1/82] - without catalogue
 ME/MC] - with soft copy only