



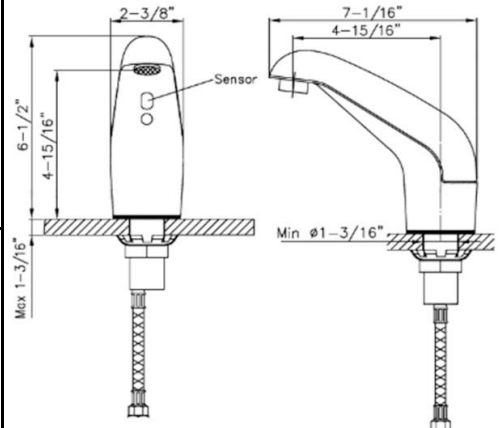
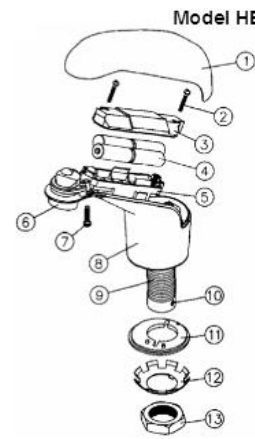


Acme Sanitary Ware Co Ltd

Acme Building, 22-28 Nanking Street, Kowloon, Hong Kong
Tel: 2388 7171 Fax: 2710 8012
E-mail: acme@acmesanitary.com.hk
Website: www.acmesanitaryware.com.hk

PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

SANITARY WARE SPECIFICATION SHEET

Item Descriptions	Hydrotek (USA) Chrome plated brass hand washing sensor faucet for cold water; operated in DC Supply; top access replacement of batteries; 0.5 GPM vandal resistant aerator	Illustration/ Drawing
Model	HB-5000E	
Dimensions	L125 x W60 x H 165 mm	
Finish	Chrome Plated	
Country of Origin	Taiwan	
Supplier	Acme Sanitary Ware Co. Ltd Mr. Eric Wong/ Mr. Don Yuen	
Contact Tel/Fax	(852) 2388-7171 / (852) 2710-8012	
E-mail	acme@acmesanitary.com.hk	
Website	www.acmesanitary.com.hk	
Product Details	<p>The 5000E Series faucet is an elegant piston operated sensory faucet that provides a vandal resistant, no touch lavatory solution that promotes better hygiene and energy savings. Designed to be easy to install and maintain, all major faucet components are encased above deck, making for easier access. The sensor included in this faucet is self adapting, meaning manual adjustments are not necessary and the innovative sensor placement eliminates ambient reflectivity issues.</p> <ul style="list-style-type: none">● Auto, time-out: - 60 seconds● Sensor range: - Self adapting● Shut-off delay: - 1 second● Battery powered models: - (4) AA Alkaline batteries● Battery service life: - 400,000 on/off cycles, up to 4 years	 
HB-5000E Battery Powered, non-mixing, Automatic Faucet: <p>Single-hole deck mount, non-mixing, automatic, lavatory faucet with chrome plated, solid, all metal construction. Includes faucet, sensor assembly, 6V DC slow-closing solenoid valve, one (1) 3/8" braided S.S. supply line, one (1) in-line filter, 0.5 GPM vandal resistant aerator, four (AA) Alkaline Batteries and all necessary faucet mounting hardware. All major faucet components (sensor, battery holder, control module PCB and solenoid valve) are housed in an innovative, vandal resistant, clam-shell designed faucet body for easy installation and quick above the deck access. Unique mounting of self-adapting sensor resolves all potential reflectivity issues.</p>		

Note:

* All information of the above is for the reference only. No prior notice is made if any changes.



Department

48樓入境事務大樓 48 樓
Tower, 7 Gloucester Road, Wan Chai, Hong Kong

本署檔號 : (4) in WSD 3321/2020 T/J(1594/2020)
Our ref.
來函檔號 :
Your ref.

電話 :
Tel.
傳真 : 2824 0578
Fax.

21 January 2021

Dear Madam,

Approval of "HYDROTEK" Sensor Taps (General Acceptance No. C20210049)

Your letters ref. 490/20 and 555/20 dated 4 December 2020 and 4 January 2021 respectively refer.

Having considered the test report ref. RHCF025 issued on 2 December 2020 by Ideal Test Consultants Ltd., this Authority accepts that the fittings described below comply with, and their use when correctly installed does not contravene, the Waterworks Ordinance and Regulations.

Name of Manufacturer: Hydrotek Corporation
Country of Origin: Taiwan, China
Brand: Hydrotek
Details of Fitting: 3/8" Deck mounted sensor tap
Model: HB-5000E and H-5000E
Body Markings: **Hydrotek**
Expiry Date: 11 November 2025

This Authority hereby permits the use of the above fittings in fresh water plumbing systems subject to full adherence to Waterworks installation requirements. In particular, you are required to draw your customers' attention to the following requirement-

"A stop cock or gate valve must be installed at the upstream of the fittings for manual isolation of water supply." AND

"The main voltage operated sensor valve should comply with the electricity safety regulation for applications in bathroom, toilet etc."

A condition of this acceptance is that the fittings to be installed shall be replicas of the samples as certified by the testing agent mentioned above and without modifications. This acceptance may be withdrawn at any time if the standard of the fittings installed fails to meet that of the approved samples or if the fittings are found to be unsuitable for use in fresh water plumbing systems.

This acceptance is only applicable to the main body of the fittings, unless otherwise specified.

For the use of the fittings in any project, the General Acceptance Number of this letter must be quoted as a means of identification of acceptance of the fittings by this Authority.

Should you have any enquiries, please contact our Engineer Mr. Terry KUNG at tel. no. 3583 4086.

Yours faithfully,



(CHAN Chung-kun)

for Director of Water Supplies

Encl.

c.c. WSD 3321/1/82] - without catalogue
 ME/MC] - with soft copy only