

> Commercial Catalogue 2023 - 2024



Acme Sanitary Ware Co. Ltd.

1/F, Acme Building, 22-28 Nanking Street, Kowloon, Hong Kong

Tel: 2388 7171 Fax: 2710 8012

Email: acme@acmesanitary.com.hk

Website: www.acmesanitary.com.hk

Since 1949

THE STORY OF INAX

When asked the reason why INAX can help people live well, INAX answers:

Japan is a country that respects the beauty of nature and people, and INAX is a brand nurtured by Japan's unique tradition and culture, inheriting the techniques and spirit of craftsmanship, relentless in the pursuit of quality.

Just as unique as Japan is in the world, INAX aims to become the brand of choice for people around the world.





General Acceptance (GA)
Water supply pipes and fittings approval issued by The Water Supplies Department.



WELS Grade 1
Showing the level of water consumption and water efficiency of the plumbing fixtures and water-consuming devices.



WELS Grade 2
Showing the level of water consumption and water efficiency of the plumbing fixtures and water-consuming devices.



Power Save
Up to 7 years battery life based on 150/day



Pre-set Program
Ensure hygiene and easy maintenance with 7 pre-set programs that combine cleaning mode, automatic flushing and thermal disinfection.



Precise Sensor
Infrared technology ensures accurate sensing.



Remote Controller
Remote control features an easy-to-read display and effortless operation.



Shine Plus
Durable chrome finish for lasting shine and luster.



Thermostatic Variants
Inlet cold water temperature 25°C, Inlet hot water temperature 60°C, knob at Mixer position.



Hot & Cold Water
Faucets can use hot and cold water.



Pull-out Spout
Pull-out spout for multifunctional usage.



AUTOMAGE – WORLD'S FIRST SELF-POWERED AUTOMATIC FAUCET

- Eco-friendly technology that harnesses the flow of water to generate power for the sensor.
- INAX SENSOR technology: Automatic infrared sensor activation for personal hygiene.



AQUA CERAMIC – 100 YEARS OF CLEAN

Aqua Ceramic material is a milestone in the history of ceramics. Stubborn soil washes away with a simple flush. The smooth, stain-repellant surface prevents unsightly hard water buildup and spots, so the bowl stays fresh and gleams like new after cleaning.
- With this revolutionary development, whiteness and shine can last a century.



Introduction Video



HYPERKILAMIC – ANTI BACTERIA AND & ANTI-SCRATCH SILVER GLAZA (Ag+) TECHNOLOGY

A proprietary technology from INAX that utilizes silver ions and zircon to develop an exceptionally smooth and hard anti-bacterial surface.

ハイパーセラミック
HYPER KILAMIC



PROGUARD – PREVENTS BUILDUP OF STAINS

An exclusive technology from INAX that is applied to the ceramic surface to prevent stains from forming, by ensuring dirt and silica in water cannot easily adhere to the surface.



VORTEX FLUSHING TECHNIQUE

Unique technique of INAX that delivers forceful stream of water that flows in a spiral motion, cleaning the bowl thoroughly.



WATER SAVING TECHNOLOGY

- INAX cares for the environment by adopting several water saving technologies including:
- ECO-X & ECO 4.5 flushing technologies.
 - ECO HANDLE, ECOFUL SHOWER & water aerator technologies that also offer a higher level of comfort and efficiency to users.





風速105m/秒のジェット風で手の水を吹き飛ばします。洗面器の手前に水返しが付いている深鉢形状。水じまいがよく、顔への不快な風の吹き返しもあります。また、ジェット乾燥が内蔵されているので、工場など、ハンドドライヤーを連立したい場所にピッタリです。

パブリックの洗面空間がさらに快適になる電気温水器付



壁掛タイプは施工性・メンテナンス性に配慮した吊り下げ式の電気温水器です。

壁掛タイプ

狭いスペースにも設置可能な壁掛けタイプ

洗面器下部にスタイリッシュなトラップカバーを付けていますので、配線も気にならず、壁もすっきりします。しかも、洗面器上部にあるステンレス製の棚の上には手荷物が置けます。



ハンドドライヤーの設置スペースが不要になり、狭いスペースでも快適。見た目もすっきりコンパクトに。

メンテナンスもカンタン



水石けんの不足はLEDでお知らせ。洗面器内で補充が行えるのでカウンターや床が汚れません。

■ A2、W2タイプを除く



洗面器の下に配管がないので床の掃除がラクです。

■ 壁掛タイプのみの対応になります。

快適に使える省エネ設計。ランニングコストを節約



【試算条件】設置台数: 50台、使用人数: 1,000人、洗面器使用回数: 5回/人・日、年間稼働日数: 265日で算出。

- 2ハンドル水栓: 2.9L/回、自動水栓: 0.8L/回
- ペーパータオル: 2枚/回 (1円/枚)、ジェット乾燥: 9秒/回
- 電気温水器の電気代、水石けん代除く。

LIXIL 多機能洗面器 ジェットボウル

PROJECT PHOTO IN HONG KONG



AIRPORT



CHURCH



CLUB HOUSE



OFFICE



L-C11A3/BW1-HK
3-in-1 Counter Top Washbasin

L566 x W475 x H270mm
Power : AC 220V



L-C21A3/BW1W-HK
3-in-1 Wall Hung Washbasin

L566 x W475 x H637mm
Power : AC 220V



防汚

グリーン
購入法

多機能洗面器 ジェットボウル

3-IN-1 WASHBASIN




AC Operated	220V (with transformer)
Rated Power Consumption	840W
Operated Pressure Range	0.05MPa - 0.75MPa
Operated Temperature Limit	5 - 40°C
Water Machine	- Spout Volume: 5 L/min
Hand Dryer	- Wind Speed: 105m/s - Drying Time: 6-9s
Soap Dispenser	- Discharge Mode: Mousse - Discharge Amount: 2 ml/ time - Tank Capacity: 4L - Replenishment: Inside the basin

Notes : A-5625 sensor tap is used in 3-in-1 washbasin.

壁掛タイプ電気温水器付

青字は給水寸法
赤字は排水寸法

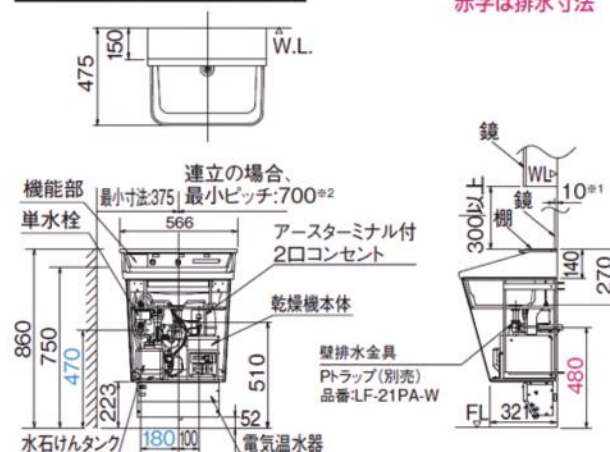

※1 10mm以下の鏡は棚部に乗せて取付可能です。それ以上の場合は300mm以上上げて取付け願います。

※2 メンテナンスのため洗面器左右にそれぞれ90mm以上のスペースをとってください。



Foam Soap
Dispenser

Sensor Faucet

Hand Dryer



NEW



L166 x W52 x H138mm



- AMV-91**
Infra-red Sensor Faucet
Power : DC 6V
Battery Box : A-91-BAT-AP



- AMV-91 + Transformer**
Infra-red Sensor Faucet
Power : AC 100-240V/50-60Hz
Adapter : Switching Type



NEW



L166 x W67 x H138mm



- AMV-91K**
Infra-red Thermostatic Sensor Mixer
Power : DC 6V
Battery Box : A-91-BAT-AP



- AMV-91K + Transformer**
Infra-red Thermostatic Sensor Mixer
Power : AC 100-240V/50-60Hz
Adapter : Switching Type



L190mm



- AMC150CA-WP**
Wall Mounted Sensor Faucet
Power : AC 220V



- AMC150TCA-WP**
Wall Mounted Thermostatic Sensor Mixer
Power : AC 220V



NEW



L190 x W104 x H46mm



- AM-160CD**
Infra-red Sensor Faucet
Power : DC
Battery Box : A-4305



L127 x W51 x H187mm



- AM-320C**
Infra-red Sensor Faucet
Power : DC 7V / 4x AA size Battery



- AM-320TC**
Infra-red Thermostatic Sensor Mixer
Power : DC 7V / 4x AA size Battery



NEW



L127 x W51 x H283mm



- AM-320HC**
Infra-red Sensor Faucet
Power : DC 7V / 4x AA size Battery



- AM-320HTC**
Infra-red Thermostatic Sensor Mixer
Power : DC 7V / 4x AA size Battery



NEW



L96 x W54 x H143mm



- AMV-90**
AMV-90K
Infra-red Sensor Faucet
Power : DC
Battery Box : A-4305



- AMV-90 (220)**
AMV-90K (220)
Infra-red Sensor Faucet
Power : AC 220V/50Hz



L108 x W51 x H138mm



- AM-300C**
Infra-red Sensor Faucet
Power : DC 7V / 4x AA size Battery



- AM-300TC**
Infra-red Thermostatic Sensor Mixer
Power : DC 7V / 4x AA size Battery



L239 x W37 x H297mm



- SF-NB451SX**
Infra-red Sink Mixer
Touchless or Manual operation
Power : AC 220V
Adapter : Switching Type





AL-294VFC/BW1
Above Counter Washbasin

L472 x W472 x H170mm



AL-652VFC/BW1
Above Counter Washbasin

L650 x W460 x H191mm



AL-293VFC/BW1
Above Counter Washbasin

L500 x W450 x H155mm



AL-445V/BW1
Above Counter Washbasin

L450 x W450 x H165mm



AL-299V/BW1
Above Counter Washbasin

L580 x W380 x H172mm



AL-2216V/BW1
Under Counter Washbasin

L550 x W380 x H175mm



AL-2293V/BW1
Under Counter Washbasin

L535 x W415 x H210mm



AL-2298V/BW1
Under Counter Washbasin

L550 x W400 x H210mm



Aqua Ceramic
水陶瓷潔淨技術



Hyper Kilamic
超微米抗菌技術

SOAP DISPENSER



Sensor Soap Dispenser

L115 x W45 x H106mm
Power : AC 100V/ 50-60Hz
Soap Tank Capacity : 4L



KS-921MCDA
Sensor Soap Dispenser
(1 Tank with 1 Spouts)



KS-923MCDA
Sensor Soap Dispenser
(1 Tank with 3 Spouts)





S618 Low P-Trap / S-Trap Toilet

L635 x W375 x H523mm

Triple Vortex Flush

Power : AC 220V/50-60Hz

S618
Low P-TrapS618
S-Trap

AQUA CERAMIC
Stain-resistant technology prevents unsightly hard water buildup and spots on the ceramic surface.



HYPER KILAMIC
An exceptionally smooth and hard surface created by LIXIL ensures easy cleaning.



Easy Clean Lift
The toilet seat lifts straight up, making it easy to wipe off stains in the gap between the toilet bowl and the seat.



Easy Release Seat
Removable seat and cover.



Plasmacluster
Plasmacluster ions disinfect airborne and bacteria on the surface of the bowl and prevent odor.



Triple Vortex Flush
Three jet streams to powerfully and efficiently flush the entire surface of the bowl, ensuring an unprecedented level of hygiene.



Air Shield Deodorizer
Air current creates a barrier within the bowl to prevent odors from escaping into the atmosphere while it powerfully removes odors.



Dual Nozzle
Dual nozzle features a separate feminine front washing nozzle for gentle cleansing experience.

Seamless Seat
Joints in the seat are eliminated, and the area behind the toilet seat is made using dirt-resistant material, making cleaning easy.

Auto Open & Close
Toilet lid opens automatically when you approach the toilet and closes as you walk away.

NightLight
A sensor illuminates the area both inside the bowl and at the user's feet.

Feminine Mild
Soft bidet spray for gentle cleaning.

Unique Bowl Design
The SAITS's bowl design cleans the bowl with every flush.

Auto Flush
The toilet flushes automatically as you rise from the seat.

Relaxing Music
Soft music plays automatically for a relaxing and comfortable.

Exchangeable Nozzle Tip
Removable nozzle tip for easy cleaning.

Soft-Closing Seat
Made from durable, easy-clean materials, the slow-close motion of the seat and lid eliminates slamming.

Powerful Vortex Flush
100% of the water discharges from dual openings to create a powerful whirlpool action, and thoroughly cleanses the entire surface of the bowl.

Skirted Design
Premium design allows for quick and easy exterior cleaning.

Heated Seat
Heated seat with Temperature Control ensures total comfort regardless of weather season.





AC-952/BW1
Wall Hung Toilet

L550 x W362 x H363mm

Powerful Flush

Tested : BS EN 997:2012, BS 3402:1969, HTM 64

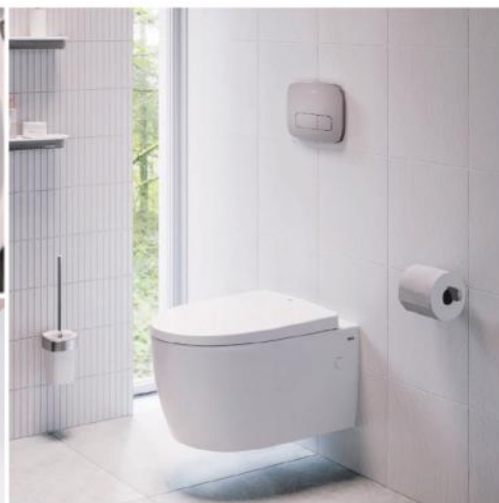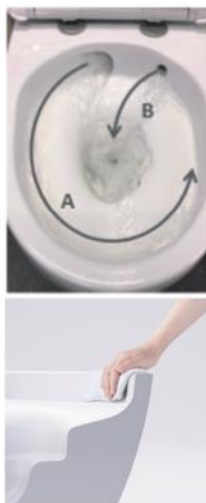

E-BIDET



CEIXEA24-1100510C0
E-Bidet 'PASSO'


L541 x W413 x H104mm

Power : AC



Ions form clusters around micro-particles such as airborne mold, influenza viruses and mite allergens, and render them inactive through a chemical reaction. It effectively inhibit Polio virus, Coxsackie virus, Influenza virus.

Plasmacluster



Heated Seat



Air shield decolorizer



Plasmacluster Ion for kill germs, Seamless seat to avoid Bacterial accumulation, Anti-bacteria Resin (seat & nozzle)

Nozzle disinfection



Bowl spray



Seamless seat



Anti-bacterial seat under ISO22196 for seat cover, nozzle & remote controller

WC FLUSHING SENSOR



OKCH-500S
Toilet Sensor Direct Flush Valve

L160 x W140 x H160mm

Power : AC 220V



	Toilet Sensor	
	Direct Flush Valve	Traditional Concealed Cistern
Public	✓	✓
Heavy Traffic	✓	x
Zero Waiting Time for Flush Water	✓	x
Space Saved	✓	x

Smart Sensor Urinal (Japan)

New Clean and Energy Saving Standard for Environmental Protection






As urbanites pay more and more attention to a healthy and environmentally friendly green life, urban planning, building construction and renovation have introduced environmentally friendly and energy-saving facilities to save energy and achieve the goal of sustainable development. As Japan's leading sanitary equipment manufacturer, INAX's sanitary ware is well known in Japan. Its intelligent sensor urinal has a simple design, combined with innovative and environmentally friendly design. Setting new standards of hygiene for local users.

Smart Sensor Urinal (ASU-500VS)



Make good use of water resources

- Aqua Ceramic The smooth, stain-repellant surface prevents unsightly hard water buildup and spots, so the bowl stays fresh and gleams like new after cleaning
- The most water efficient WELS Grade 1 
- DC and AC Power with IP68 transformer for urinal sensors are available  
- Tested on BS 5520, BS EN 13407, BS 3402, HTM64 & BS EN 274-1



Space Saving

- The sensor is located on the top of the urinal, no need to budget for the location of the hidden wall, and more corridor space is reserved
- Integrated design and installation is easier and saves construction costs
- The height of the urinal bowl apex from the ground (350mm) also meets the requirements (Max 400mm) of Chapter 123I of the Hong Kong Buildings Ordinance and the requirements of "Barrier Free Access 2008" to unify the visual level



Easy maintenance

- High durability, proven to last up to 10 years subject to 150 toilet flushes per day, with a total of 550,000 flushes
- Just open the urinal cover for maintenance, the procedure is simple
- Wall-mounted design, convenient for floor cleaning



URINAL BOWL *



AWU-500VS
(AC Supply available)
Wall Hung Sensor Urinal

L420 x W372 x H995mm



YU-A51MP/BW1
(AC Supply available)
Wall Hung Sensor Urinal

L420 x W370 x H1040mm



YU-A31MP/BW1
(AC Supply available)
Floor Stand Sensor Urinal

L420 x W370 x H1040mm



AWU-507RAMP/BW1
(AC Supply available)
Wall Hung Sensor Urinal

L410 x W380 x H930mm



YU-A12AP/BW1
Wall Hung Sensor Urinal

L390 x W370 x H980mm



AU-431VAC/BW1
Wall Hung Back Inlet Urinal

L330 x W330 x H640mm



U-431VR/BW1
Wall Hung Top-Inlet Urinal

L330 x W330 x H640mm



P1/BW1
Urinal Partition

L105 x W340 x H760mm



URINAL SENSOR *



AMU-132SM-HK
(AC Supply available)
Concealed Urinal Sensor


L140 x W115 x H115mm



AMU-131SM
(AC Supply available)
Exposed Urinal Sensor

L260 x W120 x H80mm



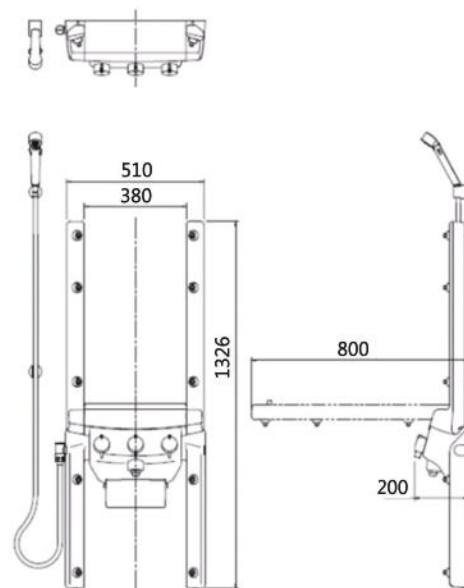

SHOWRE de BATH

WARM TRMPERATURE ADJUSTMENT HANDLE WITH SAFETY BUTTON

FULL BODY SHOWER HANDLE

Cold water drains out from the faucet at the beggining.

HAND SHOWER HANDLE

Turn the selector handle to the left to use the hand shower.



Model	NYS-3A-AT-UL / NYS-3A-AT-UR
Country of Origin	Japan
Dimensions	510mm x 200mm x 1326mm
Installation Space	510mm x 800mm x 1326mm (Hand Shower not included)
Product Mass	11.9 kg
Flow Volume	Whole body shower : 9.1 L/min (0.1MPa) Spout : 10.2 L/min (0.1MPa) Switch shower : 6.3 L/min (0.1MPa)
Operating Water Pressure Range	0.1MPa (Dynamic pressure) ~ 0.75MPa (Hydrostatic Pressure) Cold water supply pressure ≥ Hot water supply pressure
Faucet Fitting	Built-in thermostatic faucet (JIS-B2061 conforming product)
Faucet Fitting Pressure Resistance	1.75Mpa / 1 Minute
Water Heater Temperature Setting	85°C or lower Set the temperature of a water heater between 50 and 60°C to ensure it runs at its peak performance. Set the temperature of water heater at 60°C or lower to prevent scalding by accidentally running hot water.



New Bath Feeling Shower de Bath シャワー・ド・バスは、

Hand shower

Turn the selector handle to the left to use the hand shower.



Bath basic function

1. Water temperature adjustment handle with a safety button.
2. Full body shower handle, cold water drains out from the faucet at the beginning.
3. Hand shower handle.



Arms

Adjust arms to comfortable angle.



Mist shower like a veil

Each 10 nozzles are movable, you can adjust the shower angle you prefer.



MORE POSSIBILITIES FOR :



Sitting posture



Standing posture



Handicapped and Elder
Recommendation sitting
height : 300-350mm



Introduction Video
for SHOWER DE BATH



Private Hospital



Day Care Center



Nursing Home



Residential



KF-AA131CE44/WA (White)
KF-AA131CE44/Y92 (Yellow)
Child U-Turn Floor Rail
L500 x W30 x H435mm



WA (White)



Y92 (Yellow)



KF-AA910CE40/WA (White)
KF-AA910CE40/Y92 (Yellow)
Child Handrail
L400 x W30 x H210mm



WA (White)




Y92 (Yellow)



ヒヤッとしない手すり
幼児の安全・快適を考え、ステンレスの表面に樹脂を被覆しています。冬期に手すりを握った時のヒヤッと
する冷たさをやわらげます*。

幼児用手すり

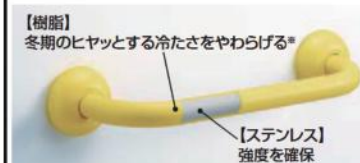

Material :
ABS coated & Stainless Steel

*感じ方には個人差があります。





ACME OFFICE - PROJECT SALES TEAM

1/F, Acme Building, 22-28 Nanking Street, Kowloon, Hong Kong

TEL : (852) 2388 7171

FAX : (852) 2710 8012



www.acmesanitary.com.hk



acme@acmesanitary.com.hk



(852) 5548 4366 (WhatsApp)

Hong Kong
Authorized Distributor



益美潔具有限公司
Acme Sanitary Ware Co. Ltd.

* Inax reserves the right to modify and/or vary the products and change the listed price without any prior notice.
* In case of any disputes, the decision of Acme Sanitary Ware Co. Ltd shall be final.