



Acme Sanitary Ware Co Ltd

Acme Building, 22-28 Nanking Street, Kowloon, Hong Kong




Tel: 2388 7171 Fax: 2710 8012

E-mail: acme@acmesanitary.com.hk

Website: www.acmesanitaryware.com.hk

PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

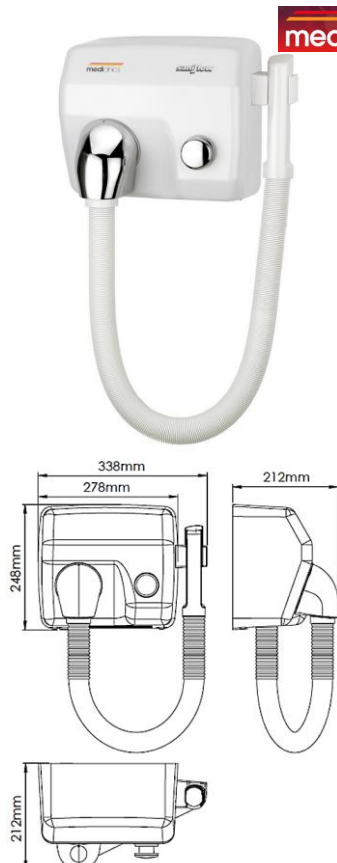SANITARY WARE SPECIFICATION SHEET

Item Descriptions	Mediclinics (Spain) steel push-button hair dryer in white enamelled coating finish	<div>Illustration/ Drawing</div> <div></div>																																		
Dimensions	L338 x W212 x H248 mm																																			
Model	SC1088HT																																			
Material/ Finish	Steel / White Enamelled Coating Finish																																			
Manufacturer	Mediclinics, S.A. (Spain)																																			
Supplier	Acme Sanitary Ware Co. Ltd Mr. Eric Wong/ Mr. Don Yuen																																			
Contact Tel/Fax	(852) 2388-7171 / (852) 2710-8012																																			
E-mail	acme@acmesanitary.com.hk																																			
Website	www.acmesanitary.com.hk																																			
<div>General description</div> <div><ul style="list-style-type: none">Saniflow® with flex hose and handle hair dryer is the hair dryer for collectivities that is most widely used in the world, regardless of the location to be fitted.These machines, push-button operated, also feature easy maintenance, low noise levels and a high level of user safety. Together with an accurate design of components, SANIFLOW dryers boast the most powerful airflow in the world, which, combined with a comfortable drying temperature, reduces drying times to a minimum.With a 1.5 mm. thick steel cover, these hair dryers are available in 2 different finishes (white enameled coating and satin). These hair dryers are ideal for Heavy traffic Bathrooms.Thus, these are proven models with a long durability and complete reliability, with anti-vandalism features and designed to be installed in high traffic of people such as sport centers, swimming pools, SPA and wellness centers and large recreational areas, among others.</div>																																				
<div></div> <div>SC1088HT White enamelled coating</div>																																				
<div></div> <div>SC1088HTCS Satin chrome</div>		<div>Technical Specifications</div> <table><tr><td>Voltage</td><td>220- 240 V</td></tr><tr><td>Frequency</td><td>50/60 Hz</td></tr><tr><td>Electrical Isolation</td><td>Class I</td></tr><tr><td>Total power</td><td>1,000 W</td></tr><tr><td>Consumption</td><td>4.5 A</td></tr><tr><td>Motor power</td><td>250 W</td></tr><tr><td>Rpm</td><td>5,500</td></tr><tr><td>Heating element power</td><td>750 W</td></tr><tr><td>Dimensions</td><td>248x338x212 mm</td></tr><tr><td>Weight</td><td>6.6 Kg</td></tr><tr><td>Cover thickness</td><td>1.5 mm</td></tr><tr><td>Effective airflow</td><td>59 m³/h (984 L/min)</td></tr><tr><td>Air velocity</td><td>97 Km/h</td></tr><tr><td>Air temperature (10 cm distance/21°C)</td><td>40 °C</td></tr><tr><td>Sound pressure (at 2m)</td><td>70 dBA</td></tr><tr><td>Protection rating</td><td>IP21</td></tr><tr><td>Hose length</td><td>1,000-2,500 mm</td></tr></table>	Voltage	220- 240 V	Frequency	50/60 Hz	Electrical Isolation	Class I	Total power	1,000 W	Consumption	4.5 A	Motor power	250 W	Rpm	5,500	Heating element power	750 W	Dimensions	248x338x212 mm	Weight	6.6 Kg	Cover thickness	1.5 mm	Effective airflow	59 m ³ /h (984 L/min)	Air velocity	97 Km/h	Air temperature (10 cm distance/21°C)	40 °C	Sound pressure (at 2m)	70 dBA	Protection rating	IP21	Hose length	1,000-2,500 mm
Voltage	220- 240 V																																			
Frequency	50/60 Hz																																			
Electrical Isolation	Class I																																			
Total power	1,000 W																																			
Consumption	4.5 A																																			
Motor power	250 W																																			
Rpm	5,500																																			
Heating element power	750 W																																			
Dimensions	248x338x212 mm																																			
Weight	6.6 Kg																																			
Cover thickness	1.5 mm																																			
Effective airflow	59 m ³ /h (984 L/min)																																			
Air velocity	97 Km/h																																			
Air temperature (10 cm distance/21°C)	40 °C																																			
Sound pressure (at 2m)	70 dBA																																			
Protection rating	IP21																																			
Hose length	1,000-2,500 mm																																			

Note:



* All information of the above is for the reference only. No prior notice is made if any changes.

Source: Mediclinics.



Acme Sanitary Ware Co Ltd

Acme Building, 22-28 Nanking Street, Kowloon, Hong Kong

Tel: 2388 7171 Fax: 2710 8012

E-mail: acme@acmesanitary.com.hk

Website: www.acmesanitaryware.com.hk

PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

SANITARY WARE SPECIFICATION SHEET


Components & materials:

- **SC1088HT**: 1.5 mm. thick steel cover, white enamelled coating finish.
- **SC1088HTCS**: 1.5 mm. thick steel cover, satin finish.
- One-piece steel cover fixed to the base by means of 2 vandal-proof lock screws and lock with special Saniflow ® wrench.
- Base in aluminium, 3 mm thick, with 4 Ø 8 mm holes for wall mounting.
- Fire resistant plastic UL 94-VO fan scroll.
- Universal brush motor, 5,500 rpm, F class, which includes a safety thermal cut-off.
- Aluminium centrifugal double symmetrical inlet fan wheel.
- Waved wire NiCr heating element on a mica frame that incorporates a thermal cut-off.
- Fixed nozzle in chrome plated Zamak.
- White handle, tube-handle adaptor, tube-nozzle adaptor, and handle holder made in PBT (Polybutylene).
- Hose made in polyurethane with stretching springsteel spiral.
- Push-button in chrome plated Zamak, that activates an electro-mechanic timer with a 90 second cycle.
- 4 silent blocks to eliminate vibrations.

Operation

Take down the ergonomic handset from its holder and press the push-button to initiate the drying process. The dryer will go on with no interruption for 90 seconds. Please direct the handset to the hair at your own convenience. Once you are finish, hang the handset to the holder.

Mounting (Recommend heights distance from the floor)

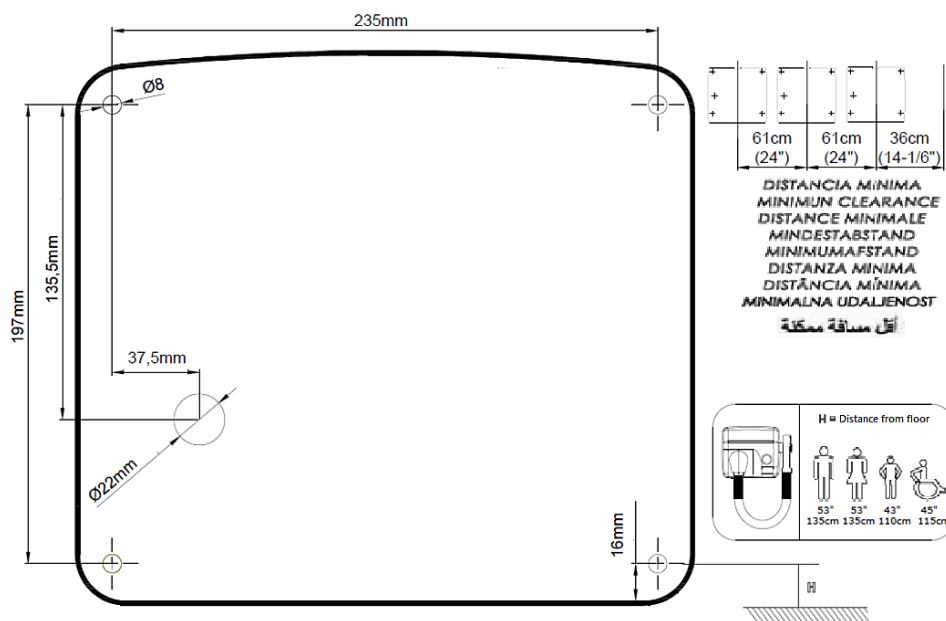

Cover removal : <https://youtu.be/6G-hoEDDoe8>

Tube and nozzle subassy replacement : <https://youtu.be/OY1pv9bAuzA>

Timer replacement : <https://youtu.be/wobj5aUTn58>

Motor replacement : <https://youtu.be/hlbBAexBLPM>

Carbon Brushes Replacement : <https://youtu.be/YMvO4a9MMbY>

Fan wheel replacement : <https://youtu.be/q2Bz76JJhAo>

Note:



* All information of the above is for the reference only. No prior notice is made if any changes.

Source: Mediclinics.