




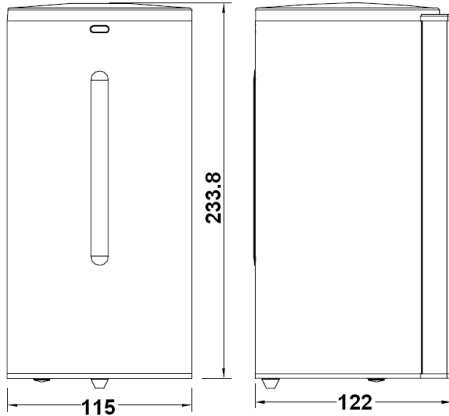
# Acme Sanitary Ware Co. Ltd.

1/F, Acme Building, 22-28 Nanking Street, Kowloon, Hong Kong  
Tel: 2388 7171 Fax: 2710 8012  
Email: acme@acmesanitary.com.hk  
Website: www.acmesanitary.com.hk



PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

## SANITARY WARE SPECIFICATION SHEET

Item Descriptions	Solomon (Taiwan) automatic soap dispenser	<div>Illustration/ Drawing</div> 																																																															
Dimensions	L122 x W115 x H234 mm																																																																
Model	SSD-9312D																																																																
Material	Stainless Steel																																																																
Manufacturer	Solomon (Taiwan)																																																																
Source	Acme Sanitary Ware Co. Ltd Mr. Eric Wong/ Mr. Don Yuen																																																																
Contact Tel/Fax	(852) 2388-7171 / (852) 2710-8012																																																																
E-mail	acme@acmesanitary.com.hk																																																																
Website	www.acmesanitary.com.hk																																																																
<table><tr><th>Specification</th><th>Specification Details</th><th>Content</th></tr><tr><td rowspan="3">General</td><td>1.1 Warranty</td><td>One year against defect</td></tr><tr><td>1.2 Duration</td><td>min. 17,000 cycles/ AA*6 alkaline battery</td></tr><tr><td>1.3 Activated Mode (Auto/ Manual)</td><td>Infrared sensor automatic</td></tr><tr><td rowspan="2">Ambiance</td><td>2.1 Ambient Temp. Range</td><td>5-40℃</td></tr><tr><td>2.2 Ambient Humidity Range</td><td>20-90%</td></tr><tr><td rowspan="6">Appearance</td><td>3.1 Dimensions</td><td>W115 x H240 x D125 mm</td></tr><tr><td>3.2 Material</td><td>Stainless Steel</td></tr><tr><td>3.3 Color</td><td>S.S.</td></tr><tr><td>3.4 Water &amp; Humidity Resistance</td><td>IP43</td></tr><tr><td>3.5 Cover Open Tool</td><td>Metal lock (brass key)</td></tr><tr><td>3.6 Installation/ Tool</td><td>Driver</td></tr><tr><td rowspan="10">Electronic</td><td>4.1 Power type</td><td>DC</td></tr><tr><td>4.2 Power Specification (power input)</td><td>DC 9V</td></tr><tr><td>4.3 Battery Type/ Numbers</td><td>Alkaline AA x 6</td></tr><tr><td>4.4 Stand-by Current</td><td>Less than 50μA</td></tr><tr><td>4.5 Active Current</td><td>Less than 380mA when activating, less than 80mA after activating</td></tr><tr><td>4.6 Adjustable Sensing Distance</td><td>5-17 cm</td></tr><tr><td>4.7 Adjustable Sensing Method</td><td>Automatic adjustable</td></tr><tr><td>4.8 Default Sensing Distance</td><td>11.5cm ± 2cm</td></tr><tr><td>4.9 Sensor Bouncing Range</td><td>Less than 3 cm</td></tr><tr><td>4.10 Required Sensing Time for Operation</td><td>0.5-1 sec</td></tr><tr><td rowspan="7">Soap Related</td><td>4.11 Indicator</td><td>LED spotlight if sensing, flash for battery low</td></tr><tr><td>5.1 Supply Type</td><td>Soap tank</td></tr><tr><td>5.2 Adjustable Drop Size</td><td>Random quantity adjustable by button switch (max 5 sec)</td></tr><tr><td>5.3 Capacity</td><td>1,000 ml (cc)</td></tr><tr><td>5.4 Material</td><td>HDPE</td></tr><tr><td>5.5 Dispenser Way</td><td>Drop type</td></tr><tr><td>5.6 Viscosity</td><td>1-3500 mPa.S</td></tr></table>		Specification	Specification Details	Content	General	1.1 Warranty	One year against defect	1.2 Duration	min. 17,000 cycles/ AA*6 alkaline battery	1.3 Activated Mode (Auto/ Manual)	Infrared sensor automatic	Ambiance	2.1 Ambient Temp. Range	5-40℃	2.2 Ambient Humidity Range	20-90%	Appearance	3.1 Dimensions	W115 x H240 x D125 mm	3.2 Material	Stainless Steel	3.3 Color	S.S.	3.4 Water & Humidity Resistance	IP43	3.5 Cover Open Tool	Metal lock (brass key)	3.6 Installation/ Tool	Driver	Electronic	4.1 Power type	DC	4.2 Power Specification (power input)	DC 9V	4.3 Battery Type/ Numbers	Alkaline AA x 6	4.4 Stand-by Current	Less than 50μA	4.5 Active Current	Less than 380mA when activating, less than 80mA after activating	4.6 Adjustable Sensing Distance	5-17 cm	4.7 Adjustable Sensing Method	Automatic adjustable	4.8 Default Sensing Distance	11.5cm ± 2cm	4.9 Sensor Bouncing Range	Less than 3 cm	4.10 Required Sensing Time for Operation	0.5-1 sec	Soap Related	4.11 Indicator	LED spotlight if sensing, flash for battery low	5.1 Supply Type	Soap tank	5.2 Adjustable Drop Size	Random quantity adjustable by button switch (max 5 sec)	5.3 Capacity	1,000 ml (cc)	5.4 Material	HDPE	5.5 Dispenser Way	Drop type	5.6 Viscosity	1-3500 mPa.S
Specification	Specification Details	Content																																																															
General	1.1 Warranty	One year against defect																																																															
	1.2 Duration	min. 17,000 cycles/ AA*6 alkaline battery																																																															
	1.3 Activated Mode (Auto/ Manual)	Infrared sensor automatic																																																															
Ambiance	2.1 Ambient Temp. Range	5-40℃																																																															
	2.2 Ambient Humidity Range	20-90%																																																															
Appearance	3.1 Dimensions	W115 x H240 x D125 mm																																																															
	3.2 Material	Stainless Steel																																																															
	3.3 Color	S.S.																																																															
	3.4 Water & Humidity Resistance	IP43																																																															
	3.5 Cover Open Tool	Metal lock (brass key)																																																															
	3.6 Installation/ Tool	Driver																																																															
Electronic	4.1 Power type	DC																																																															
	4.2 Power Specification (power input)	DC 9V																																																															
	4.3 Battery Type/ Numbers	Alkaline AA x 6																																																															
	4.4 Stand-by Current	Less than 50μA																																																															
	4.5 Active Current	Less than 380mA when activating, less than 80mA after activating																																																															
	4.6 Adjustable Sensing Distance	5-17 cm																																																															
	4.7 Adjustable Sensing Method	Automatic adjustable																																																															
	4.8 Default Sensing Distance	11.5cm ± 2cm																																																															
	4.9 Sensor Bouncing Range	Less than 3 cm																																																															
	4.10 Required Sensing Time for Operation	0.5-1 sec																																																															
Soap Related	4.11 Indicator	LED spotlight if sensing, flash for battery low																																																															
	5.1 Supply Type	Soap tank																																																															
	5.2 Adjustable Drop Size	Random quantity adjustable by button switch (max 5 sec)																																																															
	5.3 Capacity	1,000 ml (cc)																																																															
	5.4 Material	HDPE																																																															
	5.5 Dispenser Way	Drop type																																																															
	5.6 Viscosity	1-3500 mPa.S																																																															

Note: Batteries are not included.

\* All information of the above is for reference only. No prior notice is made if any changes.