
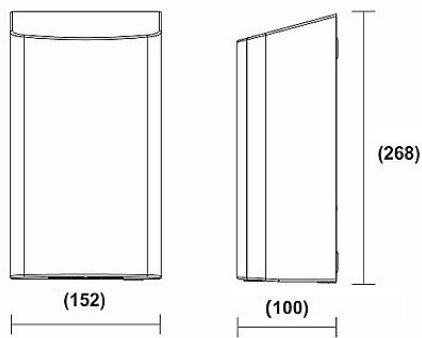























PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

SANITARY WARE SPECIFICATION SHEET

<p>Item Descriptions</p> <p>Dimensions</p> <p>Model</p> <p>Finish :</p> <p>Manufacturer</p> <p>Supplier</p> <p>Contact Tel/Fax</p> <p>E-mail</p> <p>Website</p>	<p>FASTDRY (Taiwan) #304 Stainless Steel wall mounted high speed hand dryer In Satin Finish ; slim design 100mm depth ;</p> <p>W152 x D100 x H268 mm</p> <p>ECOSWIFT05</p> <p>Satin Finish</p> <p>FASTDRY (Taiwan)</p> <p>Acme Sanitary Ware Co. Ltd Mr. Eric Wong/ Mr. Don Yuen</p> <p>(852) 2388-7171 / (852) 2710-8012 acme@acmesanitary.com.hk www.acmesanitary.com.hk</p>	<p style="text-align: center;">Illustration/ Drawing</p> <div style="text-align: center;">  </div> <div style="text-align: center; margin-top: 20px;">  </div> <div style="text-align: center; margin-top: 20px;">  </div> <div style="text-align: center; margin-top: 10px;">  </div>
<p>Smallest high speed hand dryer in the market in stainless steel #304 with beautiful brushed finishes. It takes years of experiences to make a hand dryer the size of one's palm. EcoSwift hand dryer is in Universal Design and ADA-Compliant (Americans with Disabilities Act), it fits in every washroom, especially those with restricted spaces such as on trains and airplanes. EcoSwift high speed hand dryer also has a compact inner structure, which is suitable for a customized hand dryer in different projects. It easily allows unique and customized hand dryer cover design without obstruction from internal mechanisms.</p> <p>EcoSwift05 ADA compliant 1000W Small Stainless Steel Hand Dryer Specification</p> <p>Drying Time: 10 seconds (According to UL hand dryer PCR) Operating Voltage: 110V-120Vac, 50/60 Hz, 0.84-1.0kW Operating Voltage: 220V-240Vac, 50/60 Hz, 0.84-1.0kW Standby Power: 0.3-0.4W Timing Protection: 60 seconds auto shut off Sound Level: MIN 69 dB to 76.6 dB MAX @ 1m Air Speed: 95-115 m/s, adjustable Sensing range: 170 mm ± 20 mm, adjustable Drip Proof: IP24 UL, CE, EMC, LVD, CB, WEEE, ROHS certified Patented: Taiwan, China, United States, EU</p> <p>Shipping Information</p> <p>Master Carton Size (W x H x D): 424mm x 394mm x 330mm Shipping Weight: 15.6kgs (34.4lbs)</p>		

Note:

Why EcoSwift?

Specs	Design	In Use
 air speed 95-115 m/s	 about the size of A4 paper	 10-15 seconds drying time
 standby power 0.3-0.4W	 less than 4" from the wall	 save 80% of energy cost
 1kW only	 heater on/off	 three safety protections
 IP 24	 sound & power adjustment	 60s timing protection
 carbon filter assembly (optional)	 fewer materials save resource	 easy to clean
	 recycled and reused	 easy maintenance

Cover Finish	EcoSwift05-Satin Finishing EcoSwift01B-Black Matte Coating EcoSwift 01W-White Coating
Cover Finish	EcoSwift 05-Stainless Steel (#304) EcoSwift 01B, EcoSwift01W-Stainless Steel (#430)
Packaging (carton)	4 dryers/carton. Gross weight 15.6kg. Measurement 1.7'
Drying Time	Less than 10-15 seconds
Operating Voltage	110V-120Vac, 50/60 Hz, 0.84-1.0kW 220V-240Vac, 50/60 Hz, 0.84-1.0kW
Motor Wattage	325-500W, Adjustable
Standby Power	0.3-0.4W
Air Speed	95-115 m/s, Adjustable
Sound Level	MIN 69 dB to 76.6 dB MAX @ 1m
Sensing Range	170 mm ± 20 mm, Adjustable
Drip Proof	IP24
Timing Protection	60 seconds auto shut off
Motor Thermal Protection	Auto resetting thermostat turns unit off, 120V at 135°C(275°F), 240V at 95°C(203°F)
Heater Thermal Protection	Auto resetting thermostat turns unit off at 85°C(185°F) Thermal fuse cuts unit off at 142°C(288°F)
Safety Approvals	